


REVISIONS			
REV/	NUMBER	DESCRIPTION	DATE
A		DESIGN	

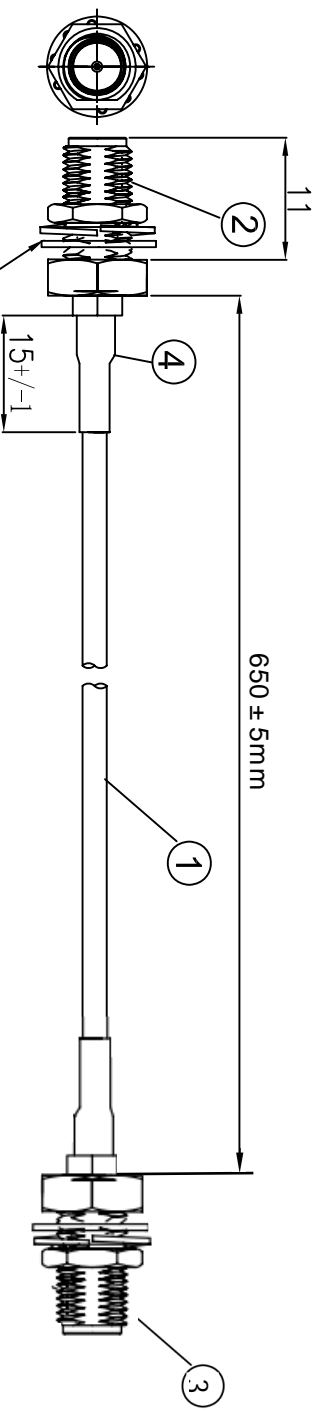

cable loss 0.3dbm@0-6G

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
 - MATERIAL:
 - SEE TABLE
 - MECHANICAL:
 - SMA PULL FORCE: 12.0KGS.
 - ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④		Black Heat-shrink Tube, OD:2.0MM	AS
③		Joint Same 2	1
②		SMA-K, split-type with 11 screws, gold-plating	1
①		Coaxial Cable RG316 Black Cable, OD:4mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD. **WWW.BDS666.COM**

KHA(RG316) -TX650-SMA **0755-83044319**

ALL DIMENSION ARE IN MM	DRAWN Jany	DATE 2018/05/04	TITLE
COMPUTER GENERATED IN SOLIDWORKS	ENG.		RF CABLE
DO NOT SCALE THIS DRAWING	MFG.		I-PEX 1.13 TO SMA / F L=650 MM
PROJECTION	Q.A.		
GENERAL TOLERANCE FOR ANGLES ± 1° ± 0.3 ± 0.25 ± 0.150			

CUSTOMER PIN:

4 3 2 1

A B C D

4 3 2 1

A B C D