


REVISIONS				
REV NUMBER	DESCRIPTION	DWN	CHK	DATE
A	DESIGN			

# Kinghelm®

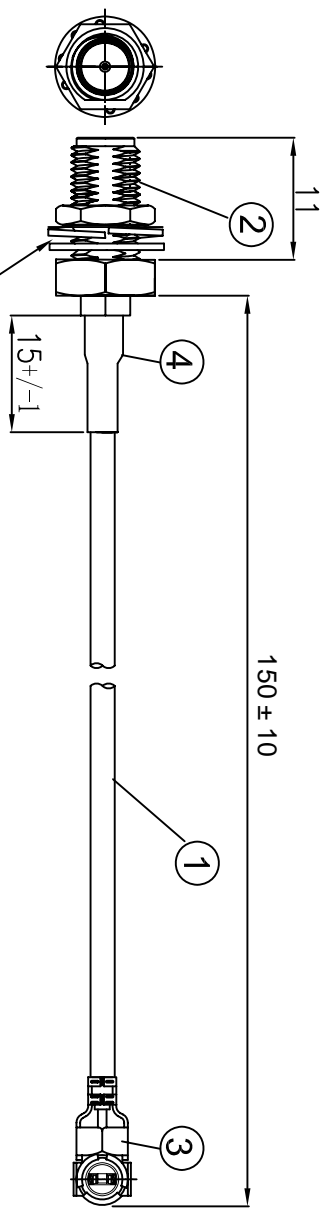

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES

2. MATERIAL:

- 2.1. SEE TABLE

3. MECHANICAL:

- 3.1. SMA PULL FORCE: 12.0KGS.

4. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 1.13 Terminal, Nickel-Plating	1
②	Joint	SMA-K, split-type with 11 screws, gold-plating	1
①	Coaxial Cable	RF1.13 Gray Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM	
<b>KHB150-39(11)-28</b>		<b>0755-83044319</b>	

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2018/05/04	TITLE
COMPUTER GENERATED IN SOLIDWORKS	ENG.		RF CABLE
DO NOT SCALE THIS DRAWING	MFG.		I-PEX 1.13 TO SMA / F L=150MM
PROJECTION	Q.A.		

GENERAL TOLERANCE FOR ANGLES XX ± 1° XXX ± 0.3 XXXX ± 0.25 XXXX ± 0.150	SCALE: Free	TYPE	SHEET 1 OF 1
---	-------------	------	--------------

CUSTOMER PIN: