




版本	描述	绘制	日期	核准
A	首次发行	Fu	2023/05/11	\

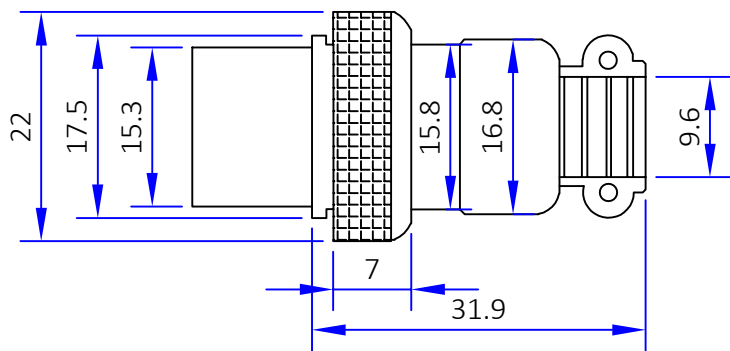

Contact Arrangement												
Rated Current	15A	15A	10A	10A	10A	10A	10A	10A	5A	5A	5A	5A
Working Voltage (AC.V.rms)	250	250	200	200	200	200	200	200	200	200	200	200
Withstand Voltage (AC.V) 1min	1500	1500	1500	1000	1000	1000	1000	1000	1000	1000	1000	1000
Contact Resistance	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ
Insulation Resistance	≥1500MΩ	≥1500MΩ	≥1500MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ

Note:		公差	X. ±0.20 X.X ±0.10 X.XX ±0.05 Angular ±5°	深圳市金航标电子有限公司	www.kinghelm.com.cn
绘制: Fu Liu	日期: 23/05/11			SHENZHEN KINGHELM ELECTRON CO.,LTD.	0755-28190160
审核:		视图		品名: GX20 母头连接器	
核准:		单位	mm	料号: KH-GX20-5P	版本 A
		比例	1:1	客户料号: /	页码:1 OF 1



版本	描述	绘制	日期	核准
A	首次发行	Fu	2023/05/12	\



Contact Arrangement	2Pin	3Pin	4Pin	5Pin	6Pin	7Pin	8Pin	9Pin	10Pin	12Pin	14Pin	15Pin
Rated Current	15A	15A	10A	10A	10A	10A	10A	10A	5A	5A	5A	5A
Working Voltage (AC.V.rms)	250	250	200	200	200	200	200	200	200	200	200	200
Withstand Voltage (AC.V) 1min	1500	1500	1500	1000	1000	1000	1000	1000	1000	1000	1000	1000
Contact Resistance	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ	≤3mΩ
Insulation Resistance	≥1500MΩ	≥1500MΩ	≥1500MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ	≥1000MΩ

Note:		公差	X. ±0.20 X.X ±0.10 X.XX ±0.05 Angular ±5°	深圳市金航标电子有限公司	www.kinghelm.com.cn
绘制: Fu Liu	日期: 23/05/12			SHENZHEN KINGHELM ELECTRON CO.,LTD.	0755-28190160
审核:		视图		品名: GX20 公头连接器	
核准:		单位	mm	料号: KH-GX20-5P	版本 A
		比例	1 : 1	客户料号: /	页码:1 OF 1