



Kinghelm®

| Rev. | ECN Number | Description | Date | Drawn | Checkd | Approved |
|------|------------|-------------|------|-------|--------|----------|
| | | | | | | |

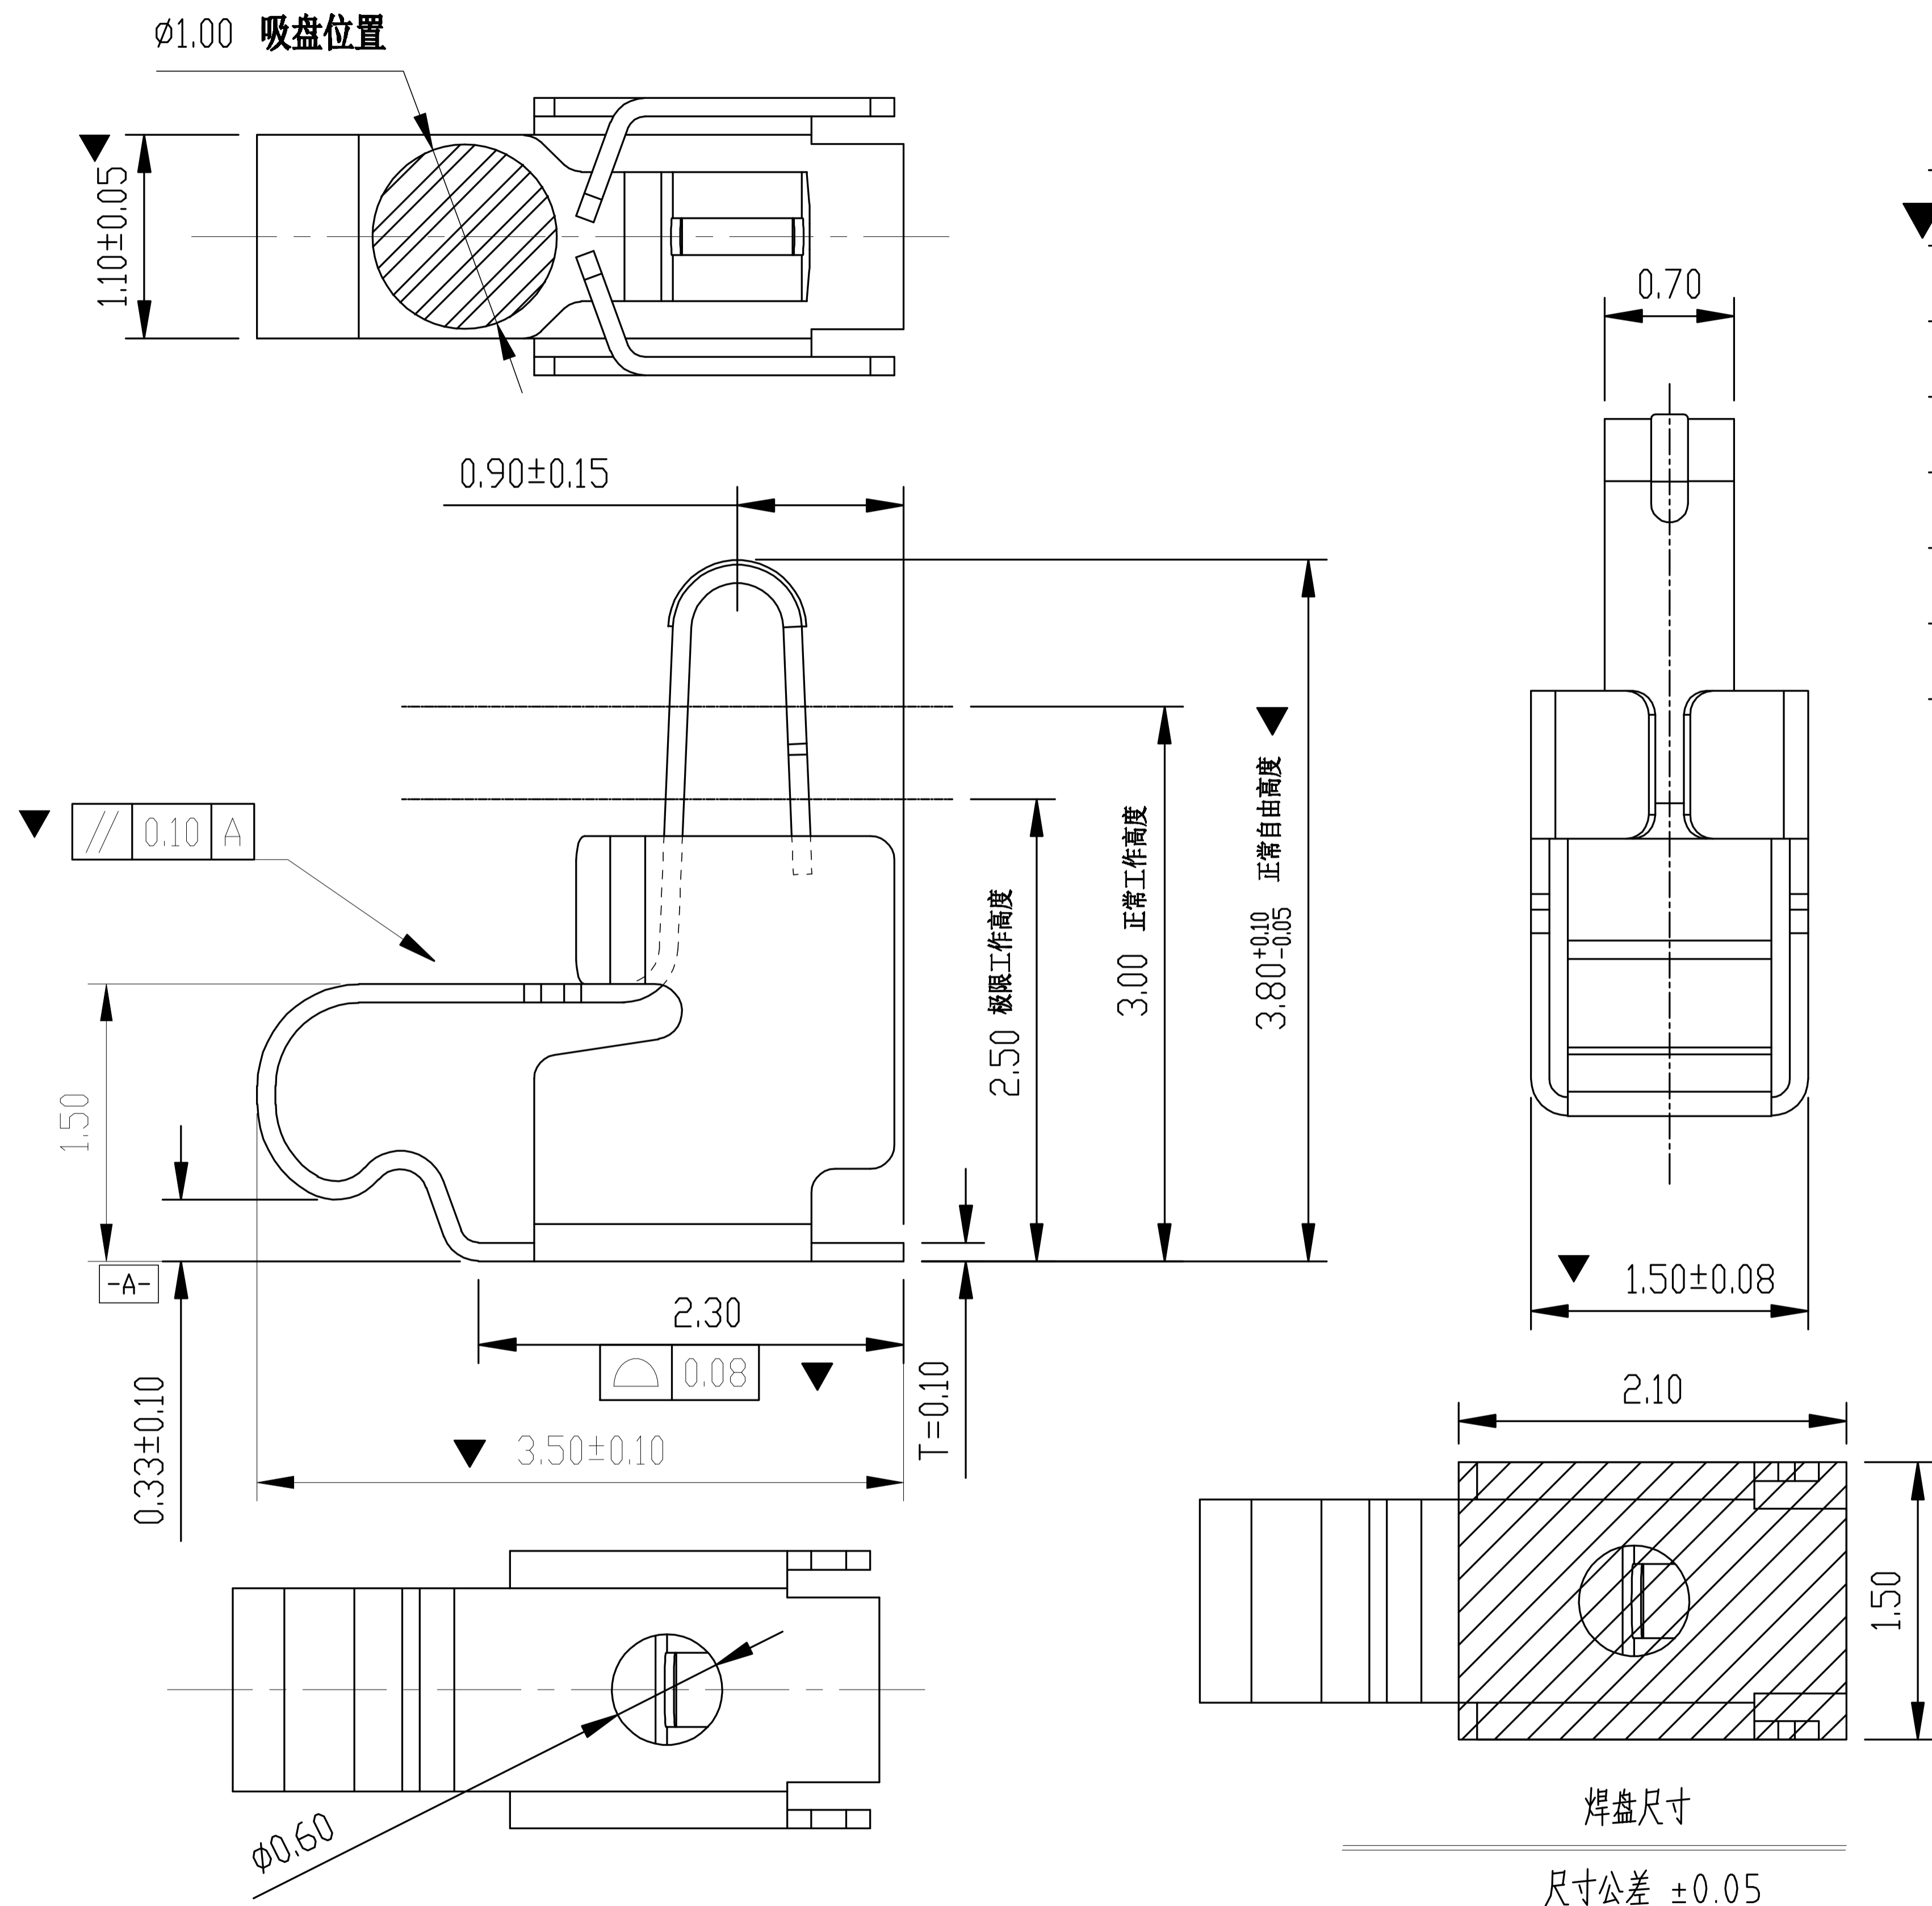

技术要求:

1. 材质: 不锈钢SUS304, T=0.10±0.005;
2. 端子锡脚焊接面和接触面不可有毛边, 其他部位毛边最大0.03mm;
3. 扭曲: 45°/1000mm, 拱形 5mm/1000mm;
4. 标示有“▼”符号的为重点控制和检验尺寸;
5. 未标注之R MAX R0.13;
6. 电镀须满足48小时盐雾测试;
7. 寿命测试>2万次, 产品弹力要求在60gf~80gf之间
8. 镍底50~80u"min, 焊接区域镀金, 接触区域镀金3U"MIN

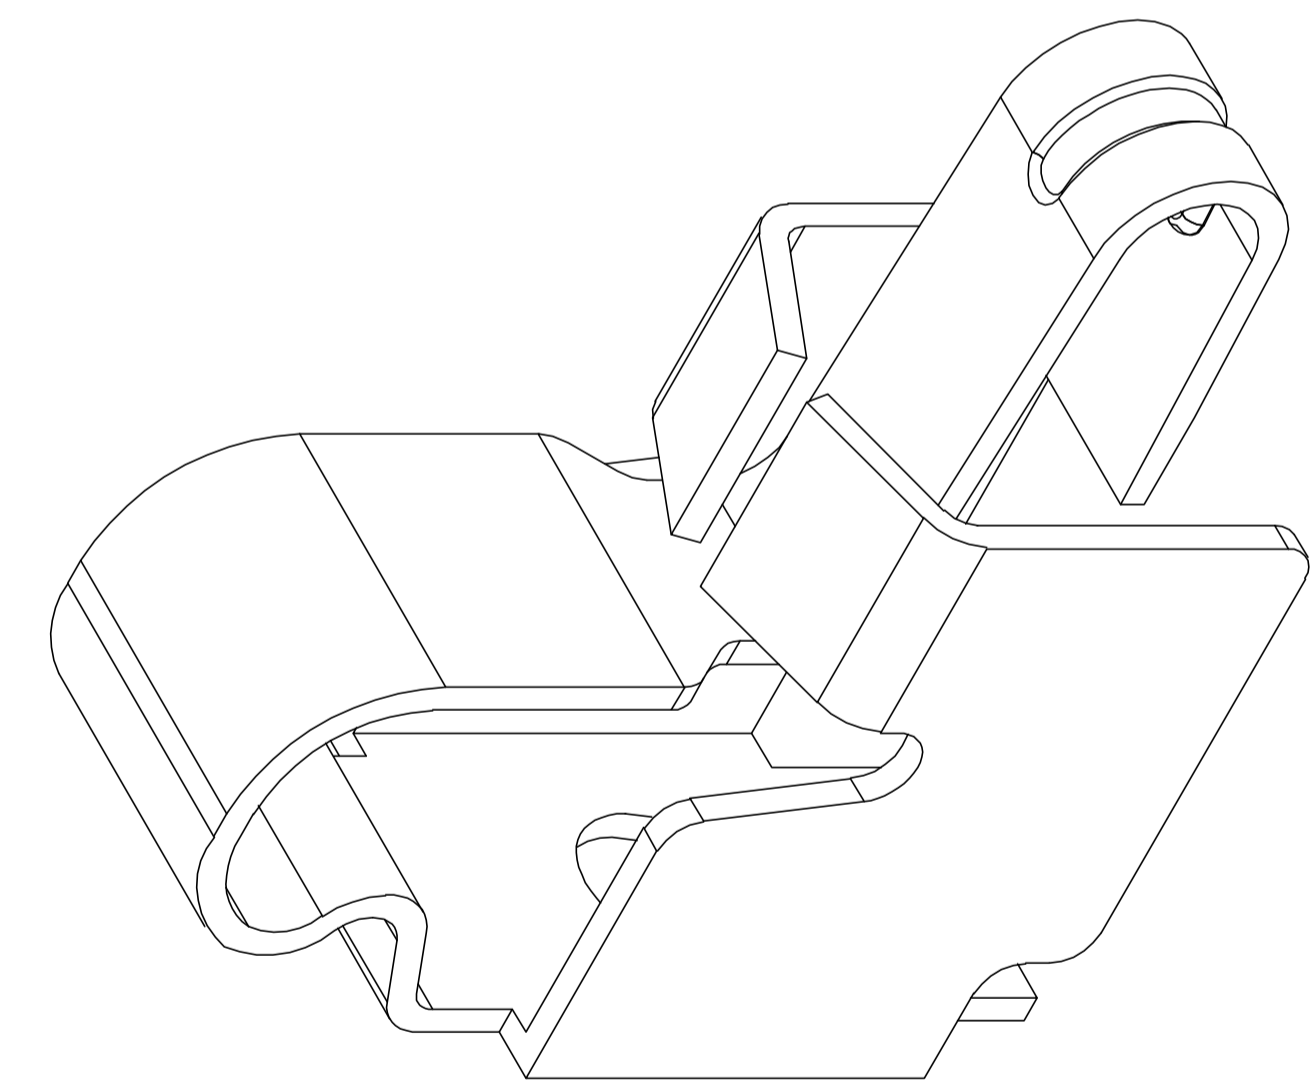

深圳市金航标电子有限公司
 WWW.BDS666.COM
 型号: KH-351538-TP
 0755-83044319

| GENERAL TOLERANCE | |
|-------------------|------------|
| XX. ±0.50 | X.° ±2.0° |
| .X ±0.35 | .X° ±1.0° |
| .XX ±0.15 | .XX° ±0.5° |

| | |
|--------|-----|
| SCALE: | 1:1 |
| UNIT: | mm |
| SIZE: | A4 |

| | |
|---------|------|
| DRAWN | DATE |
| CHECK | DATE |
| APPROVE | DATE |

| | |
|-------------------------|-------------|
| DWG. NO. | 681-0019B-1 |
| PARTS NO.(INTENDED USE) | FDX0019B1 |

| | |
|-------|---|
| TITLE | 客户图 |
| | RF Antenna Spring, SMT, L3.5*W1.5*H3.8mm |

| | |
|-------|-----|
| REV. | A |
| SHEET | 1/1 |