

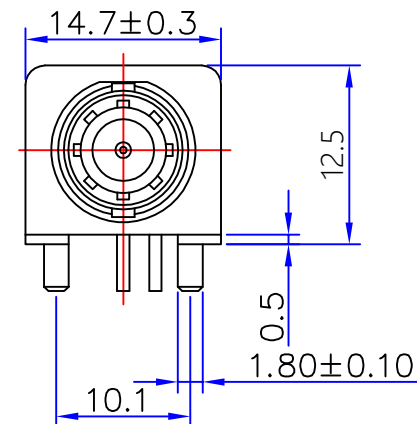



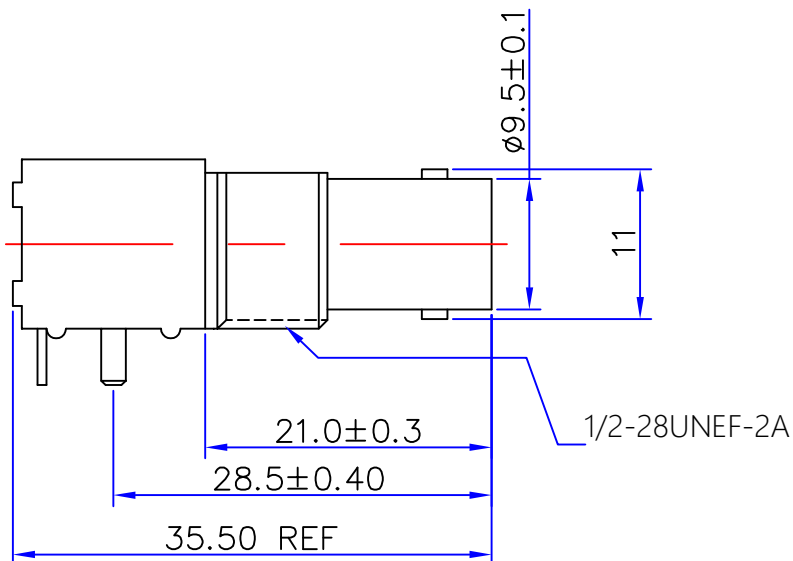


Kinghelm®



Specifications

Impedance: 75 Ohms
Frequency Range: DC~3G
VSWR: 1.3 MAX
Working Voltage: 500V rms @ sea level
Insulation Resistance: 5000 Ohms min
Temperature Range: -55°C TO +155°C
Relative Humidity: ≤95% (40°C ±2°C)
Drawings products are in line with ROHS standards

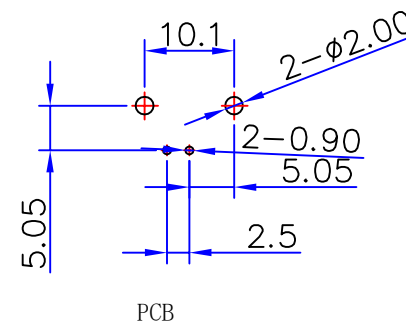

1	Body	Zinc	NI:80-120u"
2	Center contact	Brass	AU:1u"
3	Lead	Iron	AU:1u"
4	Fixed footrest	Iron	NI:80-120u"
5	Insulator	POM	White
6	Fixed mount	PBT	White
7	Washer	Brass	NI:80-120u"
8	Hex nut	Brass	NI:80-120u"
9			
10			
NO	Component Number	Material	Finish

NOTE:

DRAWN
贺骏驹
2012/11/10
CHECKED
赖积任

APPROVALS
张松强
12/04/2012

Tolerance

0-6 ±0.20
6-30 ±0.30
30-120 ±0.5
Angular ±2°

View



UNIT

MM

SCALE

1:1

SHENZHEN KINGHELM ELECTRONIC
CO., LTD.

www.kinghelm.net

KH-BNC75-3511

Name: BNC WHITE JACK CONNECTOR (12.5MM)

SIZE A Product NO. B REV

DateTime 2012/11/02 CAD FILE D/company drawings/BD SHEET: 1 OF 1