


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION		DWN	CHK
A		DESIGN			

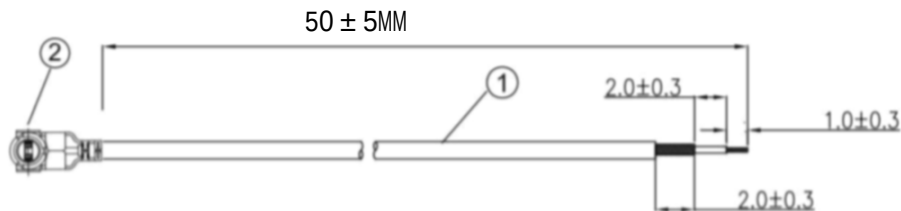

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

NO.	PART.	DESCRIPTION	QTY.
②	CONNECTOR	1 Generation IPEX Connector	1
①	COAXIAL CABLE	RG0.81 red cable, OD:0.81mm	AS

Shenzhen Kinghelm Electronics Co., Ltd

KH-IPEX-221-RG0.81-R50

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN	Jamy	DATE	2020-06-15	Gen 1 IPEX TOOPEN RG0.81 red conversion cable	
	ENG.					
	COMPUTER GENERATED IN SOLIDWORKS	MFG.				
	DO NOT SCALE THIS DRAWING	Q.A.				
PROJECTION		GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150			SIZE	Number
					B	
CUSTOMER PIN:					REV	A
					SCALE: Free	TYPE
					SHEET 1 OF 1	