


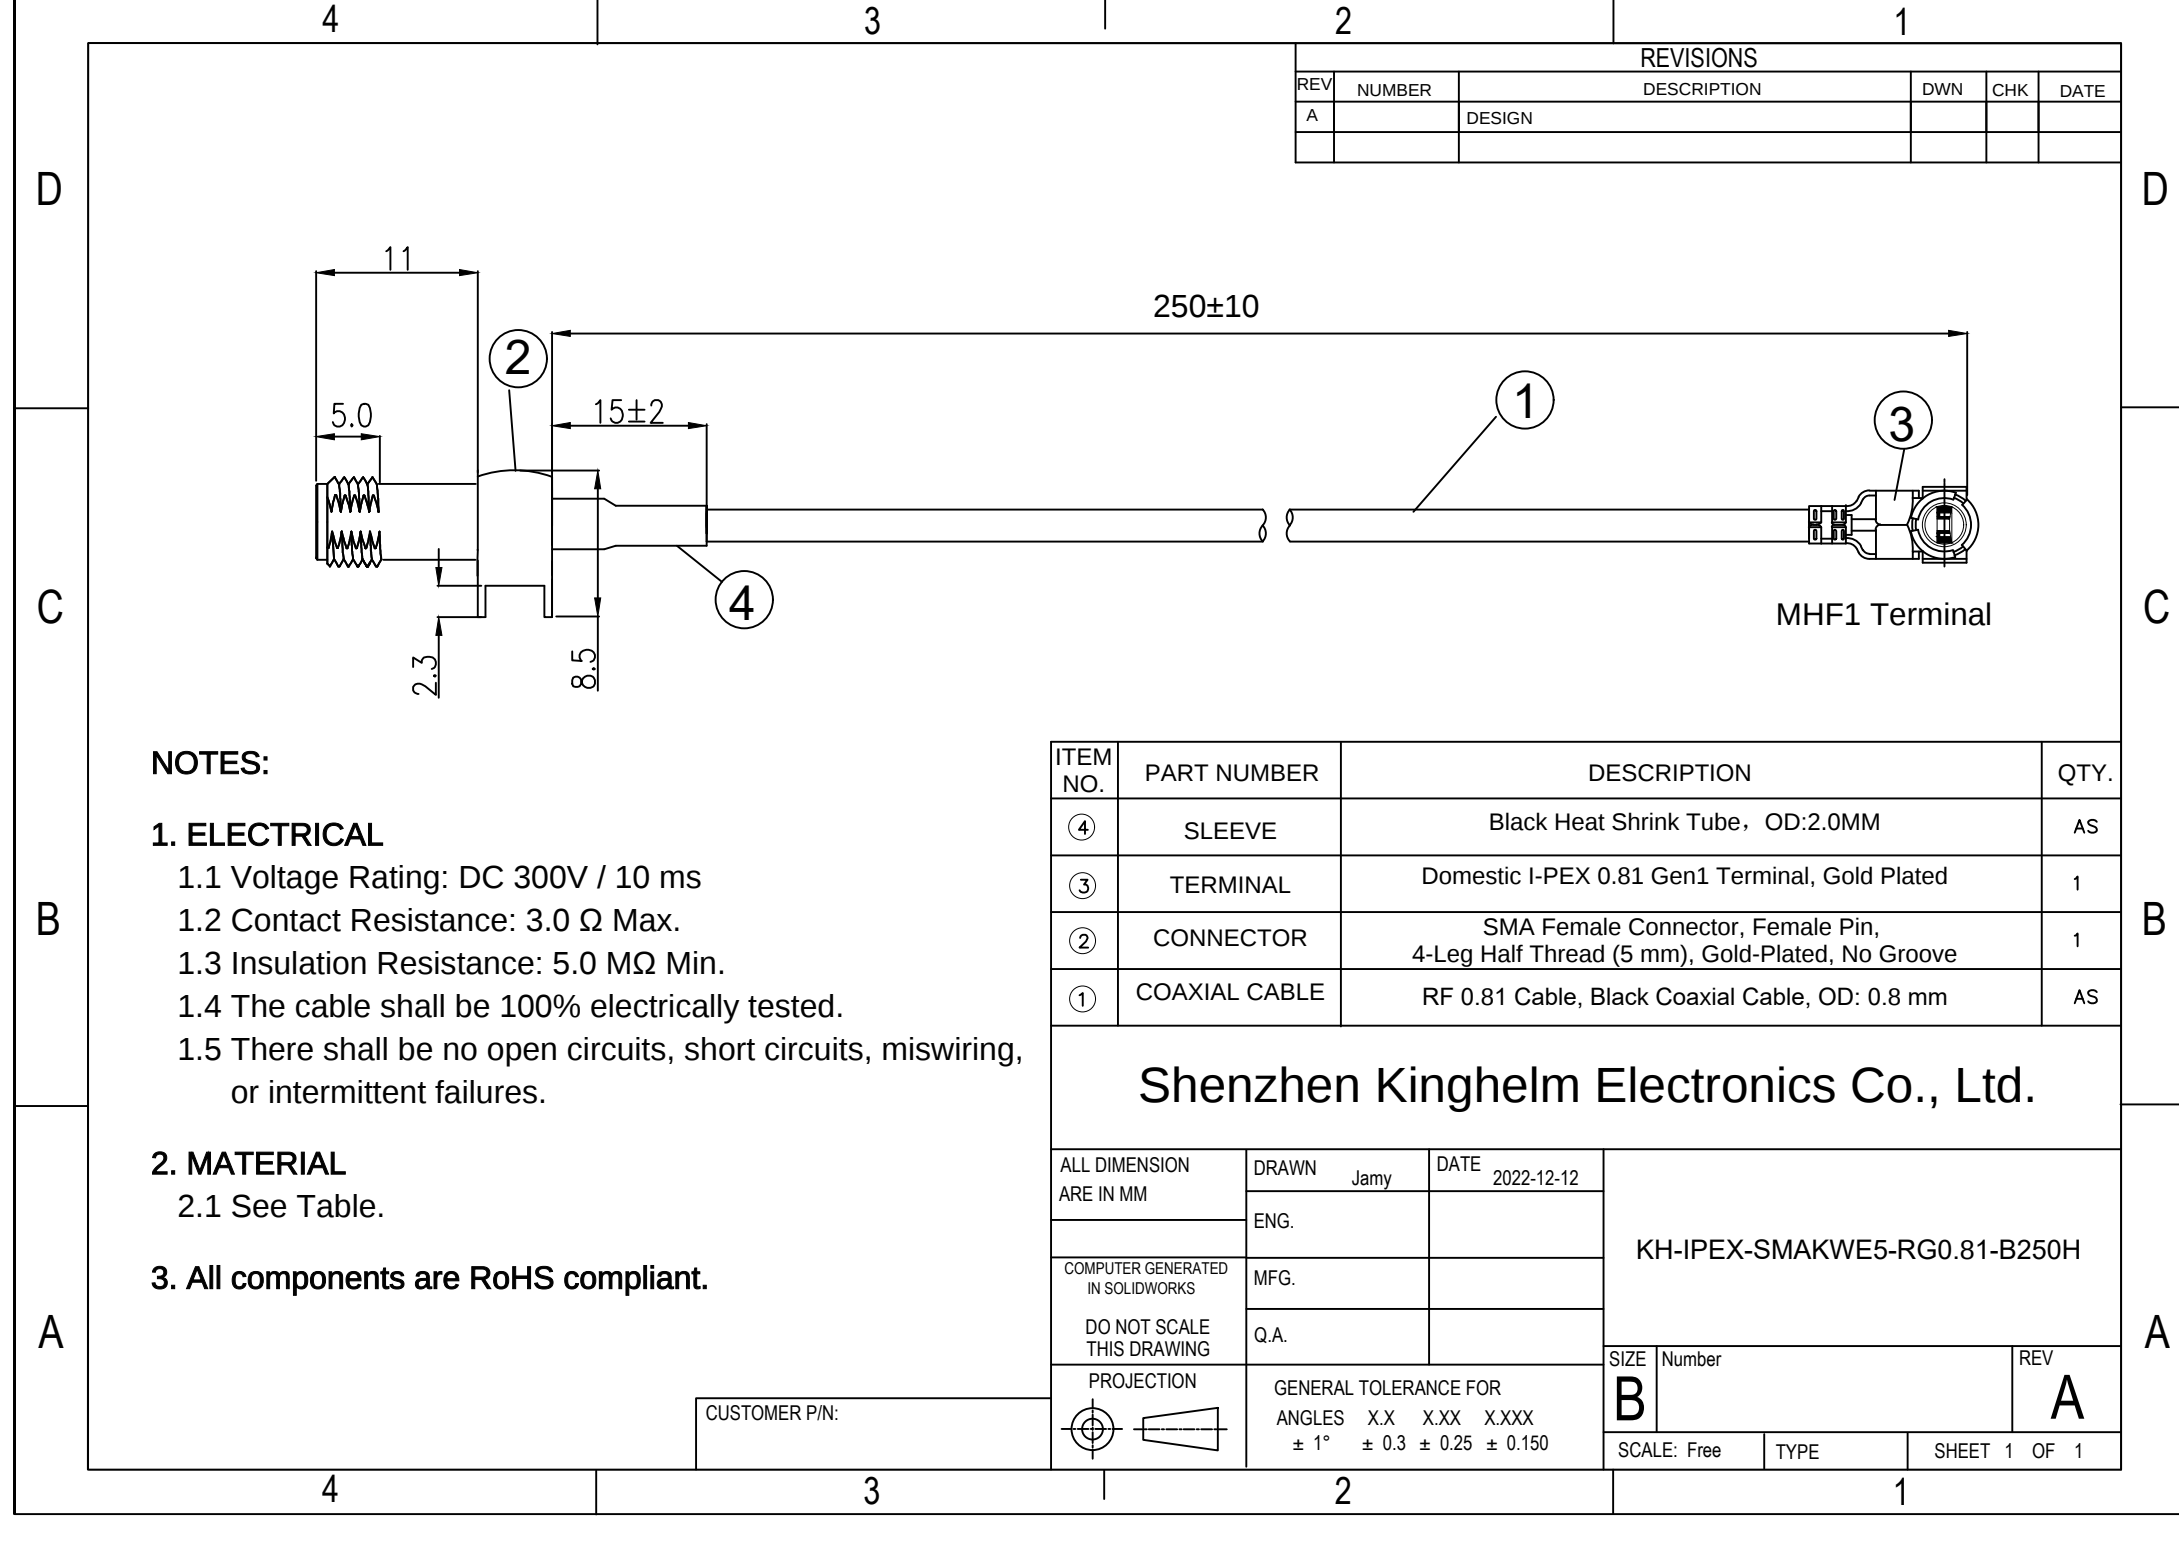

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

NOTES:

1. ELECTRICAL

- 1.1 Voltage Rating: DC 300V / 10 ms
1.2 Contact Resistance: 3.0 Ω Max.
1.3 Insulation Resistance: 5.0 MΩ Min.
1.4 The cable shall be 100% electrically tested.
1.5 There shall be no open circuits, short circuits, miswiring, or intermittent failures.


2. MATERIAL

2.1 See Table.

3. All components are RoHS compliant.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	SLEEVE	Black Heat Shrink Tube, OD:2.0MM	AS
③	TERMINAL	Domestic I-PEX 0.81 Gen1 Terminal, Gold Plated	1
②	CONNECTOR	SMA Female Connector, Female Pin, 4-Leg Half Thread (5 mm), Gold-Plated, No Groove	1
①	COAXIAL CABLE	RF 0.81 Cable, Black Coaxial Cable, OD: 0.8 mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2022-12-12	KH-IPEX-SMAKWE5-RG0.81-B250H			
	ENG.					
COMPUTER GENERATED IN SOLIDWORKS	MFG.					
DO NOT SCALE THIS DRAWING	Q.A.					
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SIZE	Number		REV
			B			A
			SCALE: Free		TYPE	SHEET 1 OF 1