
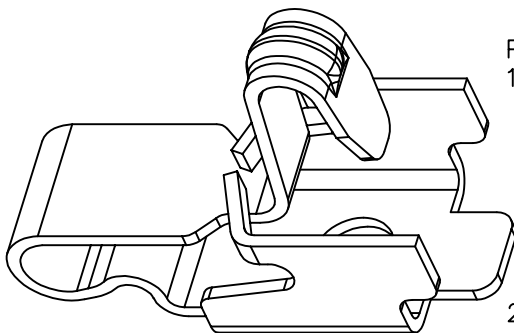


Kinghelm®

PICK UP AREA

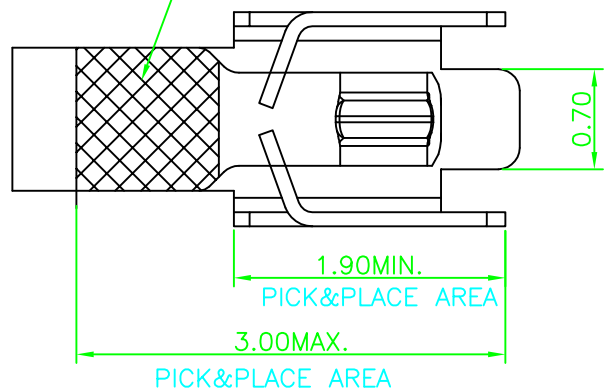

PRODUCT NO.

1. SPECIFICATIONS:





- 1.1. CONTACT RESISTANCE:80 mΩ MAX
- 1.2. VOLTAGE RATING:1.5V/AC/DC/MAX
- 1.3. CURRENT RATING:1.0A/MAX
- 1.4. PRE-LOAD FORCE:0.5±0.1N ON CONTACT POINT
- 1.5. MAX.BEAM DEFLECTION:0.7±0.1N ON CONTACT POINT
- 1.6. DURABILITY:2000 CYCLES
- 1.7. OPERATING TEMPERATURE:-20°C~80°C

2. MATERIAL:

- 2.1. STAINLESS STEEL T=0.10±0.005MM

3. FINISH:

- 3.1. 30u" MIN. NICKEL UNDERPLATING OVERALL

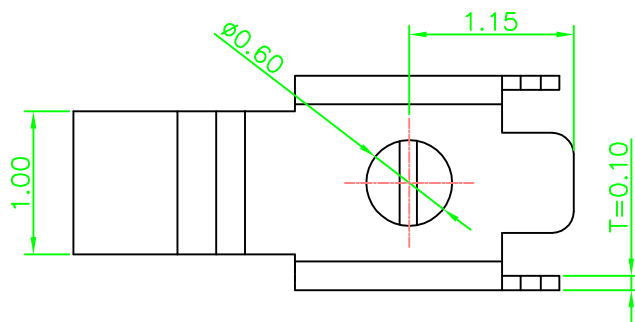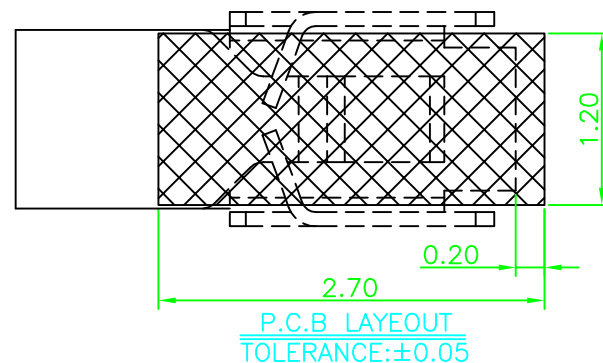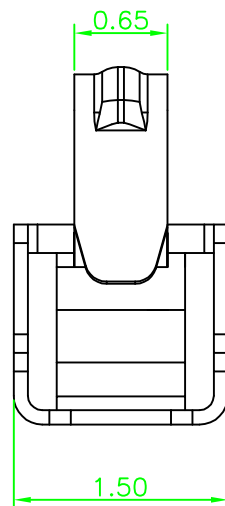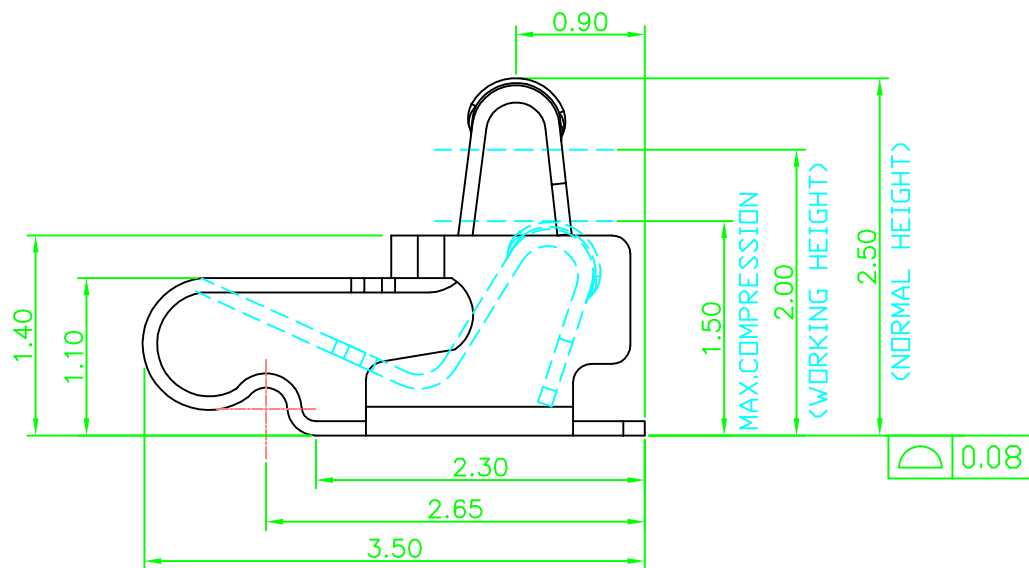

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	UNIT: MM	深圳市金航标电子有限公司		
▼=0	DISTANCE	ANGLE	MATERIAL:	HRC:	www.kinghelm.com.cn 0755-28190160		
▽=0	X. ±0.35	X.° ±2.0°	DRAWN BY	DATE	TITLE: 天线弹片 3.50*1.50*2.50H(B款)		
	.X ±0.25	.X° ±1.0°	GPYI	2018.11.04	THIRD ANGLE PROJECTION		
	.XX ±0.15	.XX° ±0.5°	CHECKED BY	DATE			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		GPYI	2018.11.04	REVISE ON CAD ONLY		
			APPROVED BY	DATE	PART NO. KH-351525-TP	DWG NO. KH-351525-TP	SHEET NO. 1/1

A4