
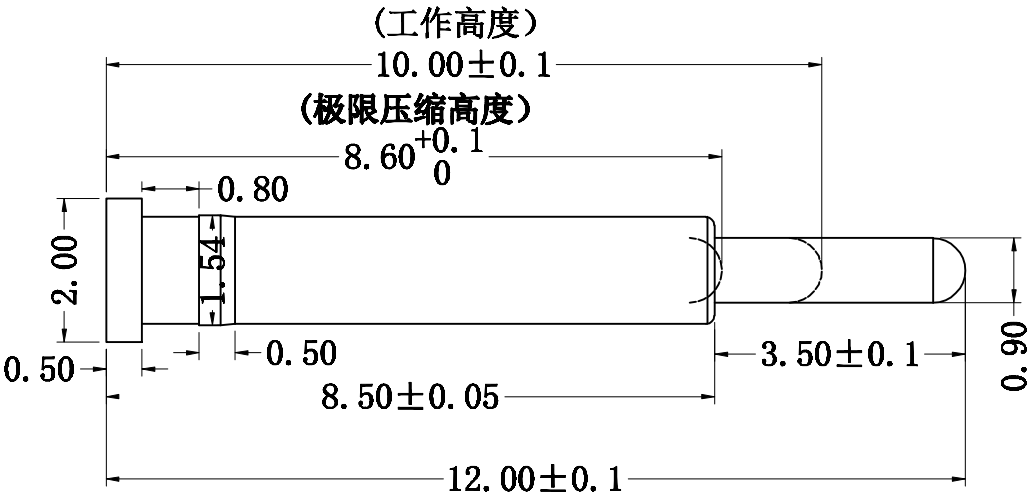



Kinghelm®



建议壳孔做1.52mm

Recommended P. C. B. Layout

- 1.材料和电镀:
针管为黄铜合金, 镀镍50-60μ", 镀金1μ".
针头为黄铜合金, 镀镍50-60μ", 镀金1μ".
弹簧为不锈钢.
- 2.持续工作电流: 1.0-1.5A
- 3.工作电压: 低于12V@25℃
- 4.使用寿命: 10000次以上
- 5.耐久性: 10000次弹簧力保持在范围内.
- 6.正向力: 工作点90±10gf
- 7.盐雾试验 5%盐溶液24小时无锈蚀.
- 8.可焊性试验 230±5℃ ±1Seconds湿焊覆盖率95%以上.



深圳市金航标电子有限公司				www.kinghelm.com.cn				
KH-PG2012005-DZ				0755-28190160				
 第三角法		品 名	Pogo pin		日期	2024/10/26		
未注公差参见标准		规格	PG2. 0-8. 5-S1. 5-12. 0mm		设计	SHAOERCHEN		
0 = ±0.1		材质	铜棒C3604		审核			
0.0 = ±0.05		客户料号			确认			
0.00 = ±0.02		表面处理	镍底镀金		单位			mm
0.000 = -		图 号			比例	1:1	版本	REV:A
请勿实测图纸								