Kinghelm®

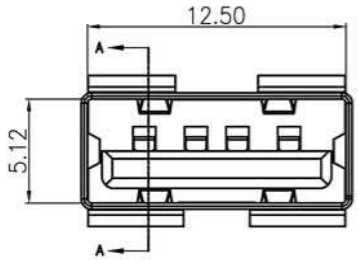





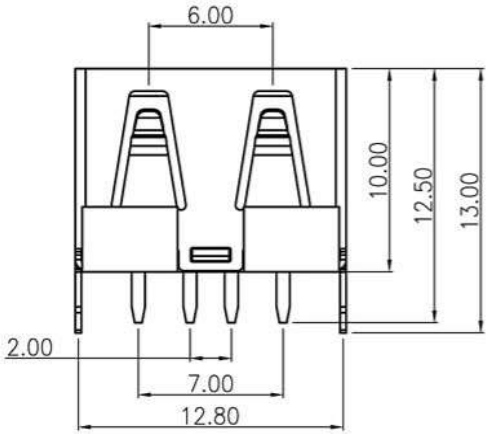

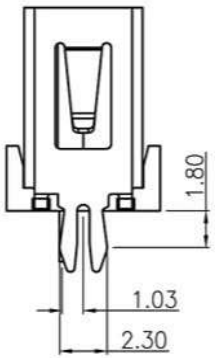





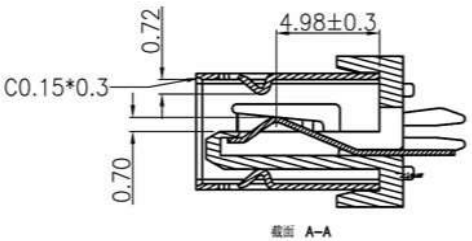

Remark

Electrical Specifications:

Contact Resistance:

30 mΩ (Max))

Insulation Impedance:

1000 KΩ (Min)

Withstanding Voltage:

500V AC 1minute

Materials:

Rubber Core:

PBT

Terminal:

Brass C2680

Housing:

Brass C2680/SPCC

Electroplating:

Terminal:

Contact area gold-plating 1 μ",

Soldering area Tin flash 100-200μ"

Housing:

Whole-area copper backing 40-60μ",

Whole-area nickel plating 60-70μ"

91-US01-XXX

- 650: PBT WHITE, Copper housing
- 651: PBT Black, Copper housing

TOLERANCE UNLESS OTHERWISE SPECIFIED												
.XXX ±0.15												
.XX ±0.30												
.X ±0.45												
.X° ±3°												
REV:	DESCRIPTION	REV BY	APPROVED	DATE	MATL:	SEE SPECIFICATION			APPROVED			
					PROJECTION:	THIRD ANGLE PROJECTION			CHECKED			
					UNIT:	SCALE	REV(NO)	SHEET	DRAWED	Hexing		
					mm	1:1	A	1 OF 1	DATE	2011.12.05		

PART NAME:	USB AF 10.0 180 without crimping !	
PART NO:	See Table	C
SHENZHEN KINGHELM ELECTRONIC CO., LTD.	WWW.BDS666.COM	
KH-AF180ZJ-10	0755-83044319	