
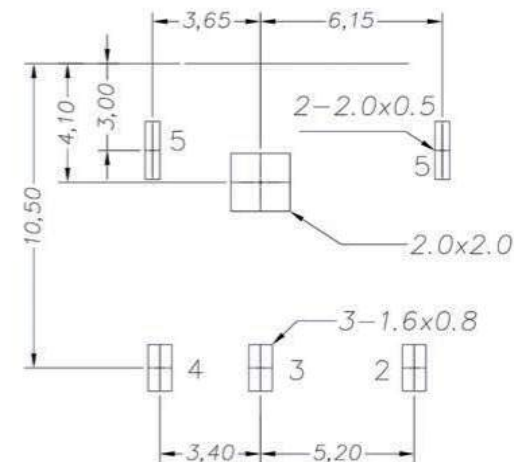
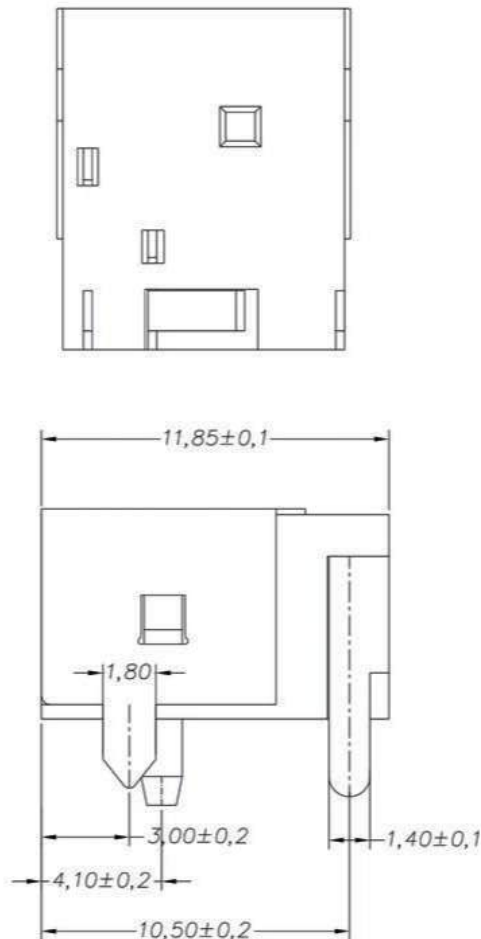


Correction (Marking)	Description	Date

Main Technical Properties	Tolerance
Rated Electrical Load	$X \pm 0.20$
Contact Resistance	$X \pm 0.10$
Insulation Resistance	$XX \pm 0.05$
Withstand Voltage	$XXX \pm 0.02$
Insertion-withdrawal Force	$X' \pm 5^\circ$
Range of Operating Temperature	$X' \pm 2^\circ$
Service Life	$XX \pm 1^\circ$

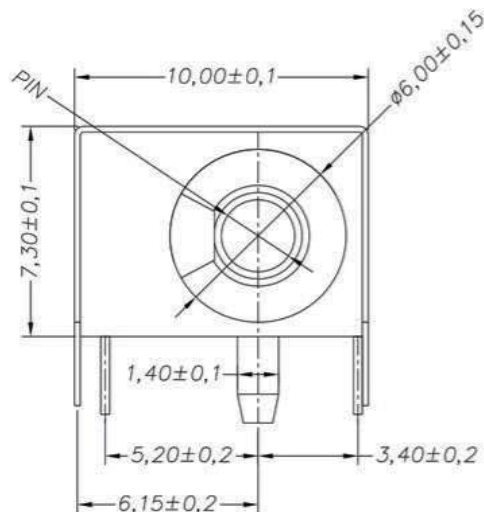

P. C. B LAYOUT TOP VIEW

PIN	1.65	2.0	2.5
APPO			

7						
6	DC-044B	Center Pin	1	H62 Brass Rod		Cu-Sn
5	DC-044B	Cover Plate	1	H62 Brass Strip	T=0.2	Nickel-Plating
4	DC-044B	Flat Piece	1	H62 Brass Strip	T=0.3	Zhongyin
3	DC-044B	Inserting Piece	1	H62 Brass Strip	T=0.3	Zhongyin
2	DC-044B	Flexible Piece	1	H65 Phosphorus copper strip	T=0.3	Zhongyin
1	DC-044B	Base	1	PPA	Black	
Serial Number	Item No	Designation	Quantity	Material	Specification	Electroplating

Schematic	Visual Angle	Designed	Department Countersignature				Product name:
		Edition	A 2	Assembly Department		Stamping Department	DC Electrical Socket
		Date	2017.09.20	Injection Department		Marketing Department	Model:
		Scale	Checked				DC-044B
		4:1	Approved		6 sheets in total	Sheet 4	
SHENZHEN KINGHELM ELECTRONIC CO., LTD.					WWW.BDS666.COM		
KH-DC-044B-2.0					0755-83044319		