


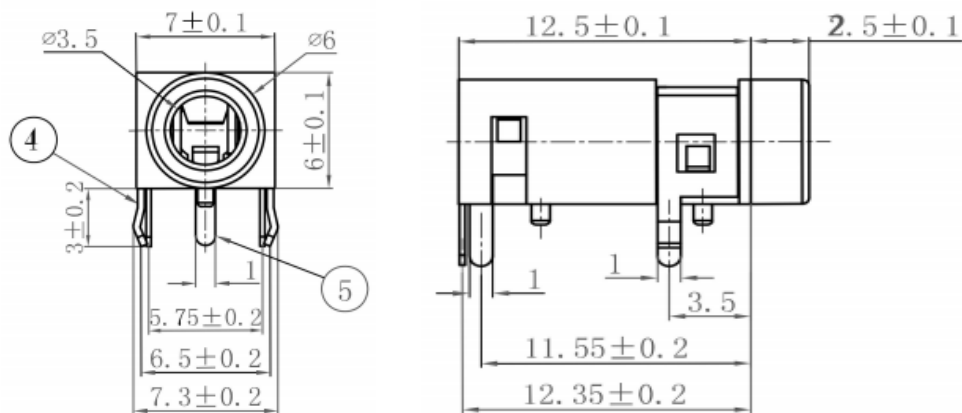
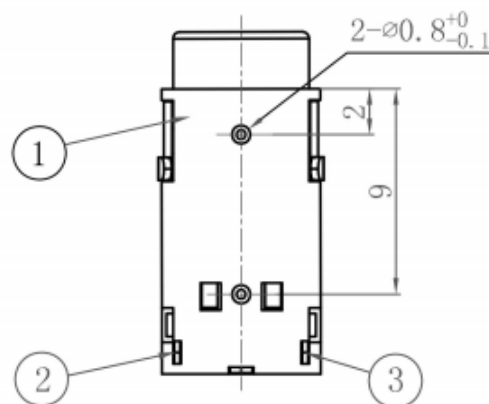




The PCB Hole Dimensions

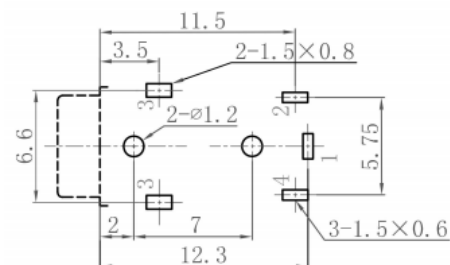

Circuit Diagram



TECHNICAL CHARACTERISTICS:

1. Operating Conditions: $-30^{\circ}\sim 70^{\circ}\text{C}$
2. Rated Load: DC 30V 0.5A
3. Control Resistance: $\leq 0.03\Omega$
4. Insulation Resistance: $\geq 100\text{M}\Omega$ DC 250V
5. Dielectric Strength: AC 500V(50Hz)/min
6. Insertion Force: 3~20N
7. Service Life: 5000 times

						General Tolerance		Shenzhen Kinghelm Electronics Co., Ltd		www.kinghelm.com.cn	
								KH-PJ-322		0755-28190160	
						X.X ±0.1 X.XX ±0.05 X.XXX ±0.005		Model:			
								Earphone jack PJ-322 pin configuration			
						Angle Tolerance		Part Number:			
								Unit		Sheet	Scale
						X.° ±5.0° X.X° ±3.0° X.XX° ±1.0°		mm		1/1	4:1
5	Center Pin	Phosphor Bronze Strip T=0.25mm	1	Copper-tin							
4	Shell Pin	Phosphor Bronze Strip T=0.30mm	1	Copper-tin	REVISION						
3	Short Pin	Phosphor Bronze Strip T=0.25mm	1	Copper-tin	DRAWN 15-6/12						
2	Long Pin	Phosphor Bronze Strip T=0.25mm	1	Copper-tin	DES' D 15-6/12						
1	Base	PBT Engineering Plastic	1	Color Coding	CHK' D 15-6/12						
S/N	Name	Material	Quantity	Plating/Color	APP' D 15-6/12						