


Kinghelm®

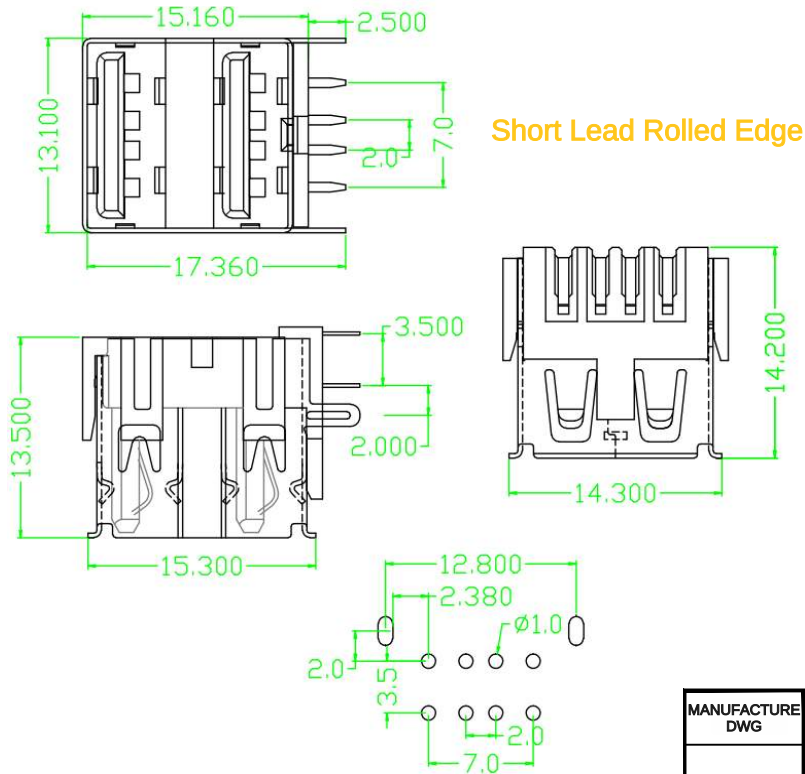

1.Material:

Contaeis:Phosphone

Bronze

Insulater:PBT+30%

G.F.UL 94V-0

Shell:SPCC

2.Mechanical:

Mating:35N max.

Withdrowa Force:10N min.

Darability:1500 cycles min.

3.Elecetical:

Current-max(amps)1.5A

Voitage-max(volls)30V

Withtdanding Voltage 750V AC

Contact Resistance(ohms)30

Milliohms max insulation.

Resistance(ohms) 1000 Megogms min.

4.Plating:

Contacts:Gold And Tin Over Nickel Ploled.

Shell:Nickel over all plating.

5.Environmental:

Lemperature Range:-55 to 85.

MANUFACTURE DWG	TOLERANCE UNLESS OTHERWISE			Shenzhen Kinghelm Electronics Co., Ltd.		www.kinghelm.net			
				KH-2AF90ZJ-13.5JB					
	UNITS	MM		INCH	Product Name				
	.X	±0.20	.X	± <u> </u>	USB A/F Double-layer 90° Short Body				
	.XX	±0.10	.XX	± <u> </u>	13.5mm Rolled Edge				
	.XXX	±0.05	.XXX	± <u> </u>	VIEW		DRAWING		CHKD
					SCALE	1:1	DESIGN		APPD
	2013. 08. 29				Version		Reel Number		Sheet Count 1/1