



Kinghelm®

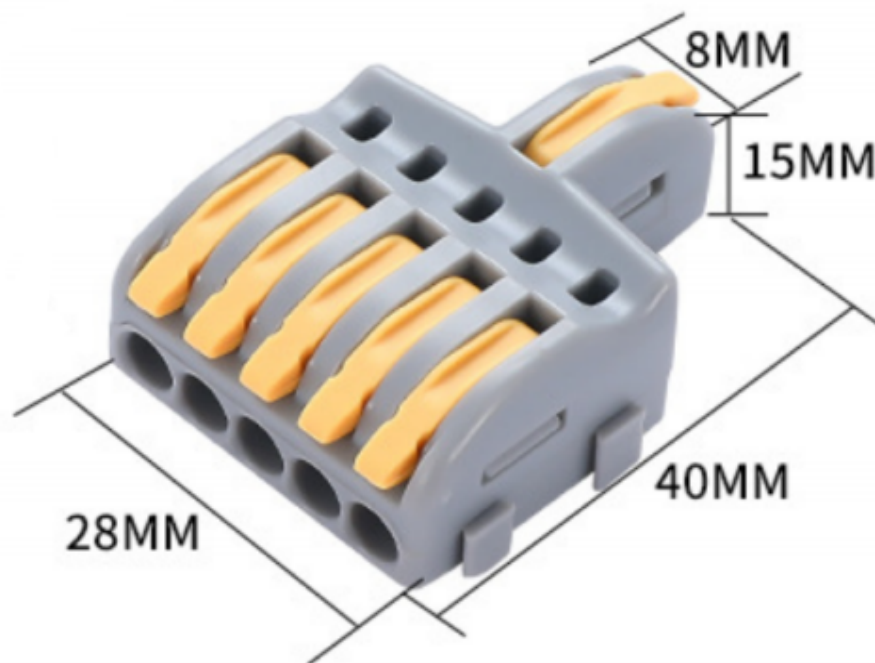

One-in five-out yellow terminal block

Technical Parameters

- **Applicable Wire Gauge:** 0.08 - 4.0mm²/28 - 11AWG (For Both Flexible and Hard Wires)
- **Temperature Range:** -40° to 110°
- **Rated Voltage:** 450V
- **Insulation Voltage:** 4kV
- **Rated Current:** 32A
- **Material:**
 - Shell: PA66/Polycarbonate PC
 - Connector: Red Copper
 - Spring Clip: 301 Stainless Steel
- **Comply With:** ROHS 2.0 Standard
- **Standard:** GB13140.1 - 2008
- **Stripping Length:** 10m (Note: The unit of "Stripping Length" here may be incorrect. Considering the previous context, it is generally 10mm. If it is actually 10mm, translate it as "10mm")

Shenzhen Kinghelm Electronics Co., Ltd.		Tolerance		Name		Unit	mm		
KH-KPCT-F15-Y	www.kinghelm.net	0,000 0,00 0,0	± 0,05 ± 0,10 ±	KH-KPCT-F15-Y		Proportion	1:1	Customization Date	2019-02-19
		0,				View			
		ANGLE	± 1°			REV	A0		