


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

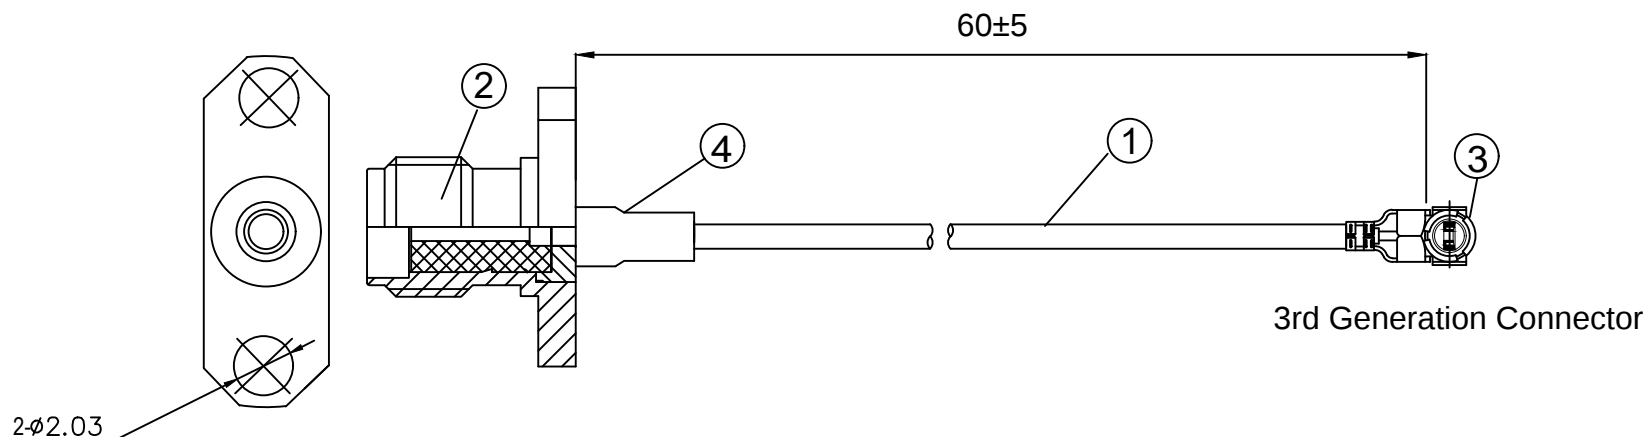

NOTES:

1.ELECTRICAL:

- 1.1.VOLTAGE RATING:DCV 300V10MS
- 1.2.CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
- 1.3.INSULATION RESISTANCE:5.0M OHM/MIN.
- 1.4.THE CABLE SHOULD BE 100%ELECTRICAL TEST
- 1.5.ITSHOULD BE NOANY OPEN/SHORT,MISWIRING AND INTERMITTENT FAILURES.

2.MATERIAL:

2.1.SEE TABLE

3.ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Tube	Heat Shrink Tubing, Black, Ø2.0mm	AS
③	Terminal	I-PEX, 0.81mm 3rd Generation Connector, Gold-Plated	1
②	Connector	Female Jack, Two-Hole Flange, Gold-Plated, External Thread Internal Contact	1
①	Coaxial Cable	RF0.81 Cable, Black Coaxial Cable, OD: 0.81mm	AS

Shenzhen Kinghelm Electronics Co., Ltd

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2023-08-18	KH-FL2SMAK-IPEX3-RG0.81-B60	
	ENG.			
	MFG.			
	Q.A.			
COMPUTER GENERATED IN SOLIDWORKS				
DO NOT SCALE THIS DRAWING				
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SIZE B	REV A
CUSTOMER P/N:		SCALE: Free	TYPE	SHEET 1 OF 1