


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

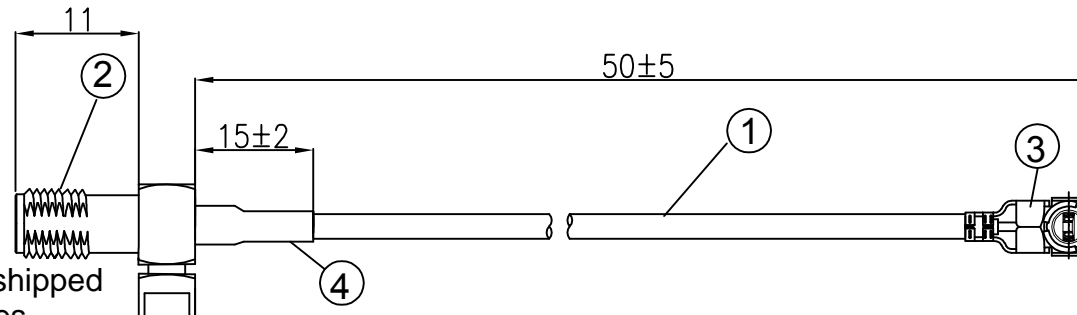

The three fittings will be shipped with additional accessories included in the shipment. (gasket, washer, nut)

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	Black Heat Shrink Tubing, OD: 2.0mm	AS
③	Terminal	I-PEX, 1.13mm Terminal, Gold-Plated	1
②	Connector	SMA Female Jack Connector (with Female Pin), with 4 Pins, 11 Threads, Gold-Plated	1
①	Coaxial cable	RF Cable (1.13mm, Black), OD: 1.13mm	AS

Shenzhen Kinghelm Electronics Co., Ltd

KH-IPEXA-SMAKWE-B050H

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN	James	DATE	2021-10-30	I-PEX 1.13 TO SMA / F L=50mm
	CHKD.	Frank		2021-10-30	
	APPD.	Scott		2021-10-30	
COMPUTER GENERATED IN SOLIDWORKS					
DO NOT SCALE THIS DRAWING					
PROJECTION	GENERAL TOLERANCE FOR ANGLES				
	X.X X.XX				
	± 1° ± 0.3 0.25 0.150				
	SIZE	Number	REV		
	B	X.XXX	A		
SCALE: Free		TYPE		SHEET	1 OF 1

CUSTOMER P/N: