


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

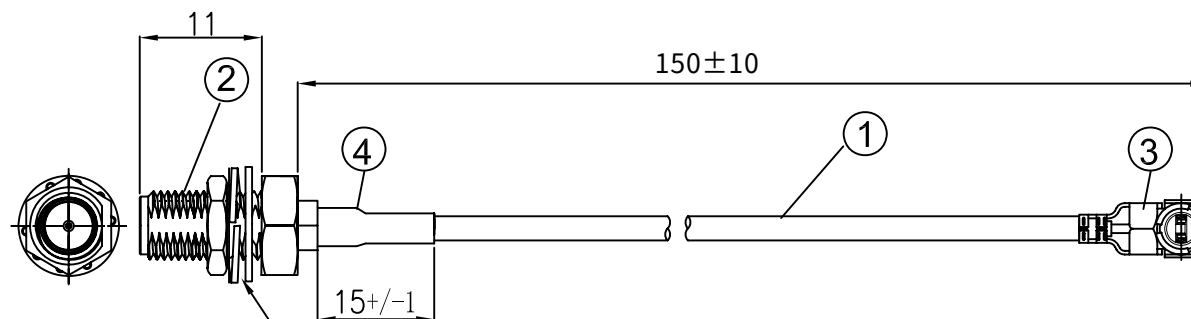

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
- MATERIAL:
 - SEE TABLE
- MECHANICALL:
 - SMA PULL FORCE: 12.0KGS.
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 1.13 Terminal, Nickel-Plating	1
②	Joint	SMA-K, split-type with 11 screws, gold-plating	1
①	Coaxial Cable	RF1.13 Gray Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

www.kinghelm.net

KHB150-39(11)-28

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2018 /05 /04	TITLE RF CABLE I-PEX 1.13 TO SMA /F L=150 M M		
	ENG.				
	MFG.				
	Q.A.		SIZE B	Number	REV A
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING		PROJECTION 		GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150	
CUSTOMER P/N:			SCALE: Free	TYPE	SHEET 1 OF 1