


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

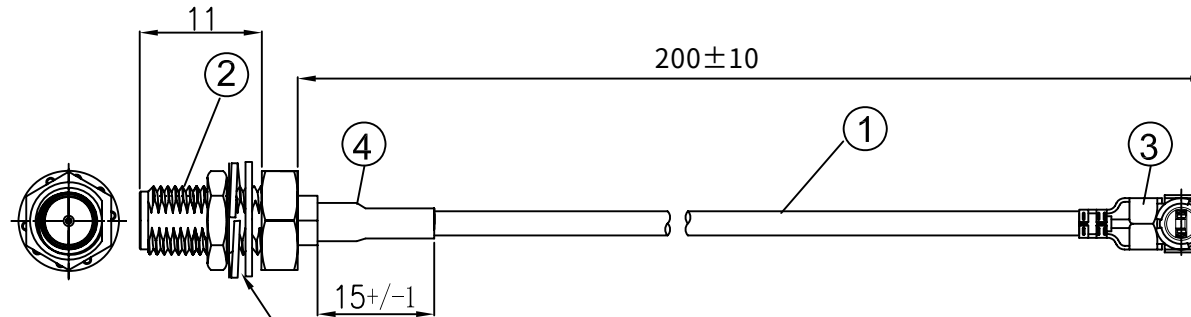


Three components are delivered with accessories (2 washers and 1 nut)

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
- MATERIAL:
 - SEE TABLE
- MECHANICALL:
 - SMA PULL FORCE: 12.0KGS.
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 1.13 Terminal, gold-plating	1
②	Joint	SMA-K, split-type with 11 screws, gold-plating	1
①	Coaxial Cable	RF1.13 Gray Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.	www.kinghelm.net
KHB200-38(11)-28	

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2018 /05 /04				
	ENG.		TITLE RF CABLE I-PEX 1.13 TO SMA /F L=200 M M			
	MFG.					
	Q.A.					
COMPUTER GENERATED IN SOLIDWORKS			SIZE	Number		REV
DO NOT SCALE THIS DRAWING			B			A
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150					
			SCALE: Free		TYPE	SHEET 1 OF 1