
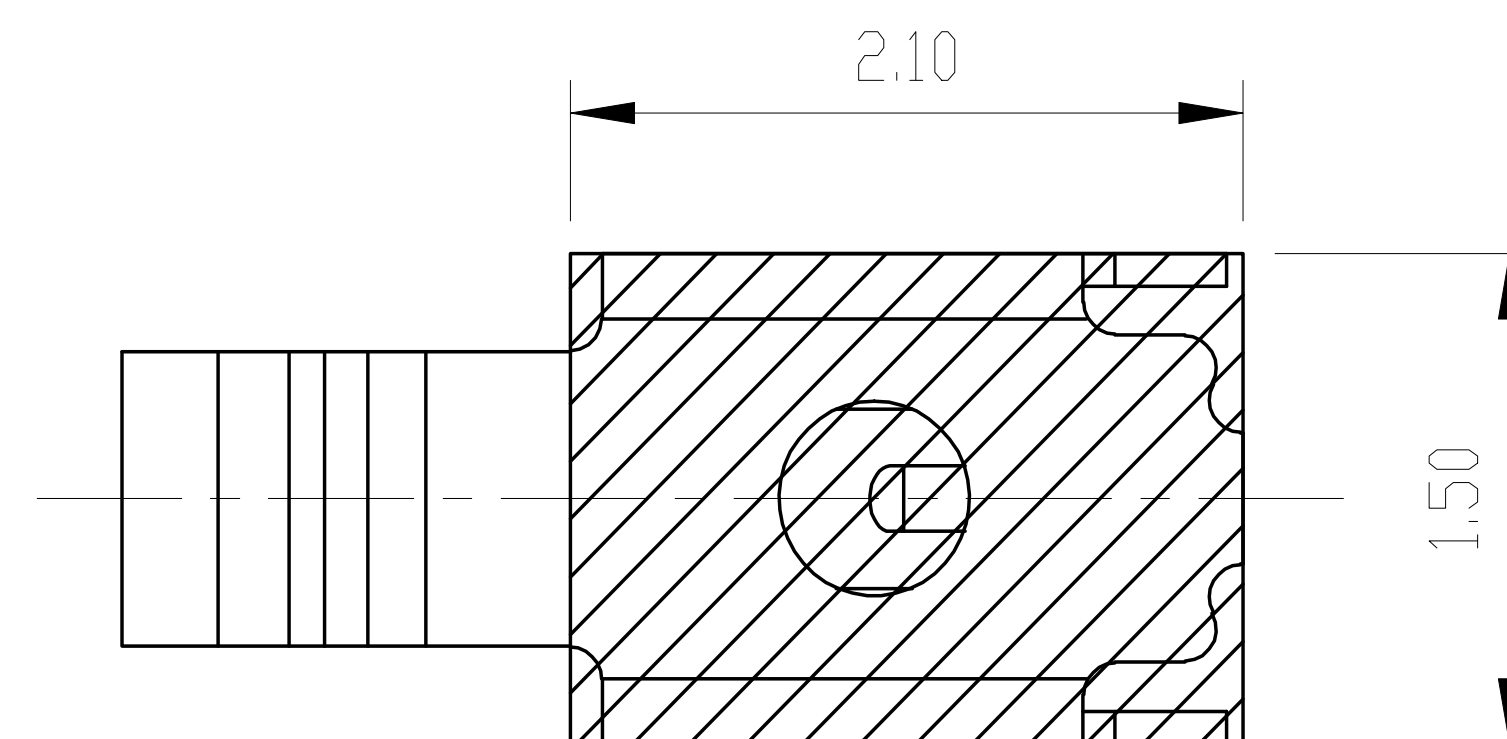
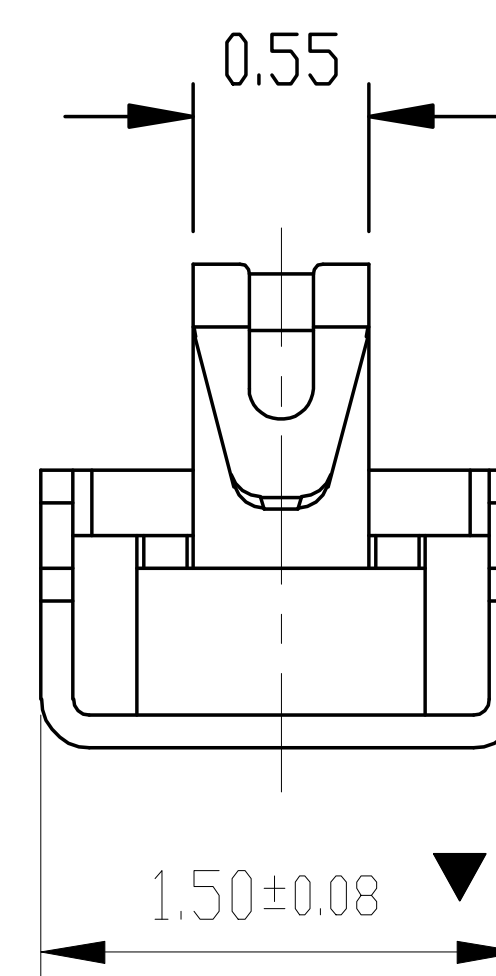
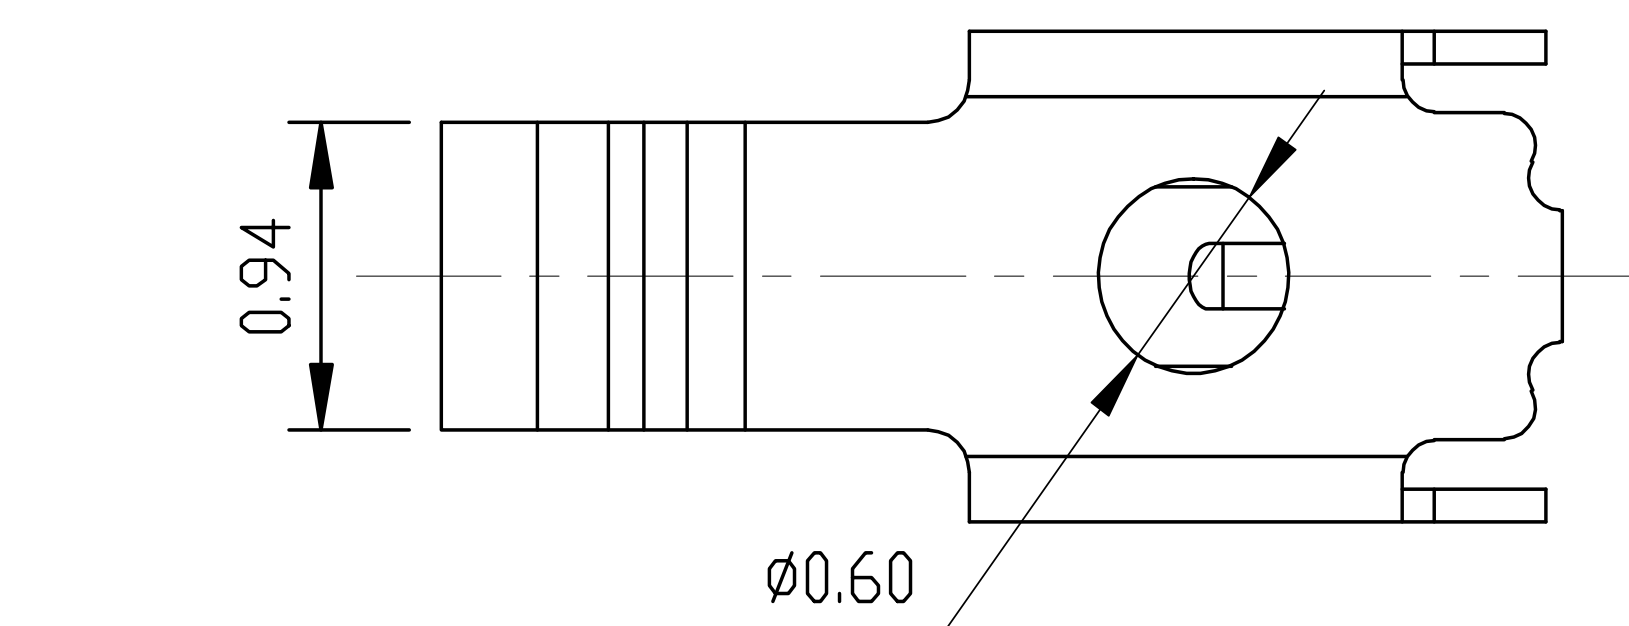
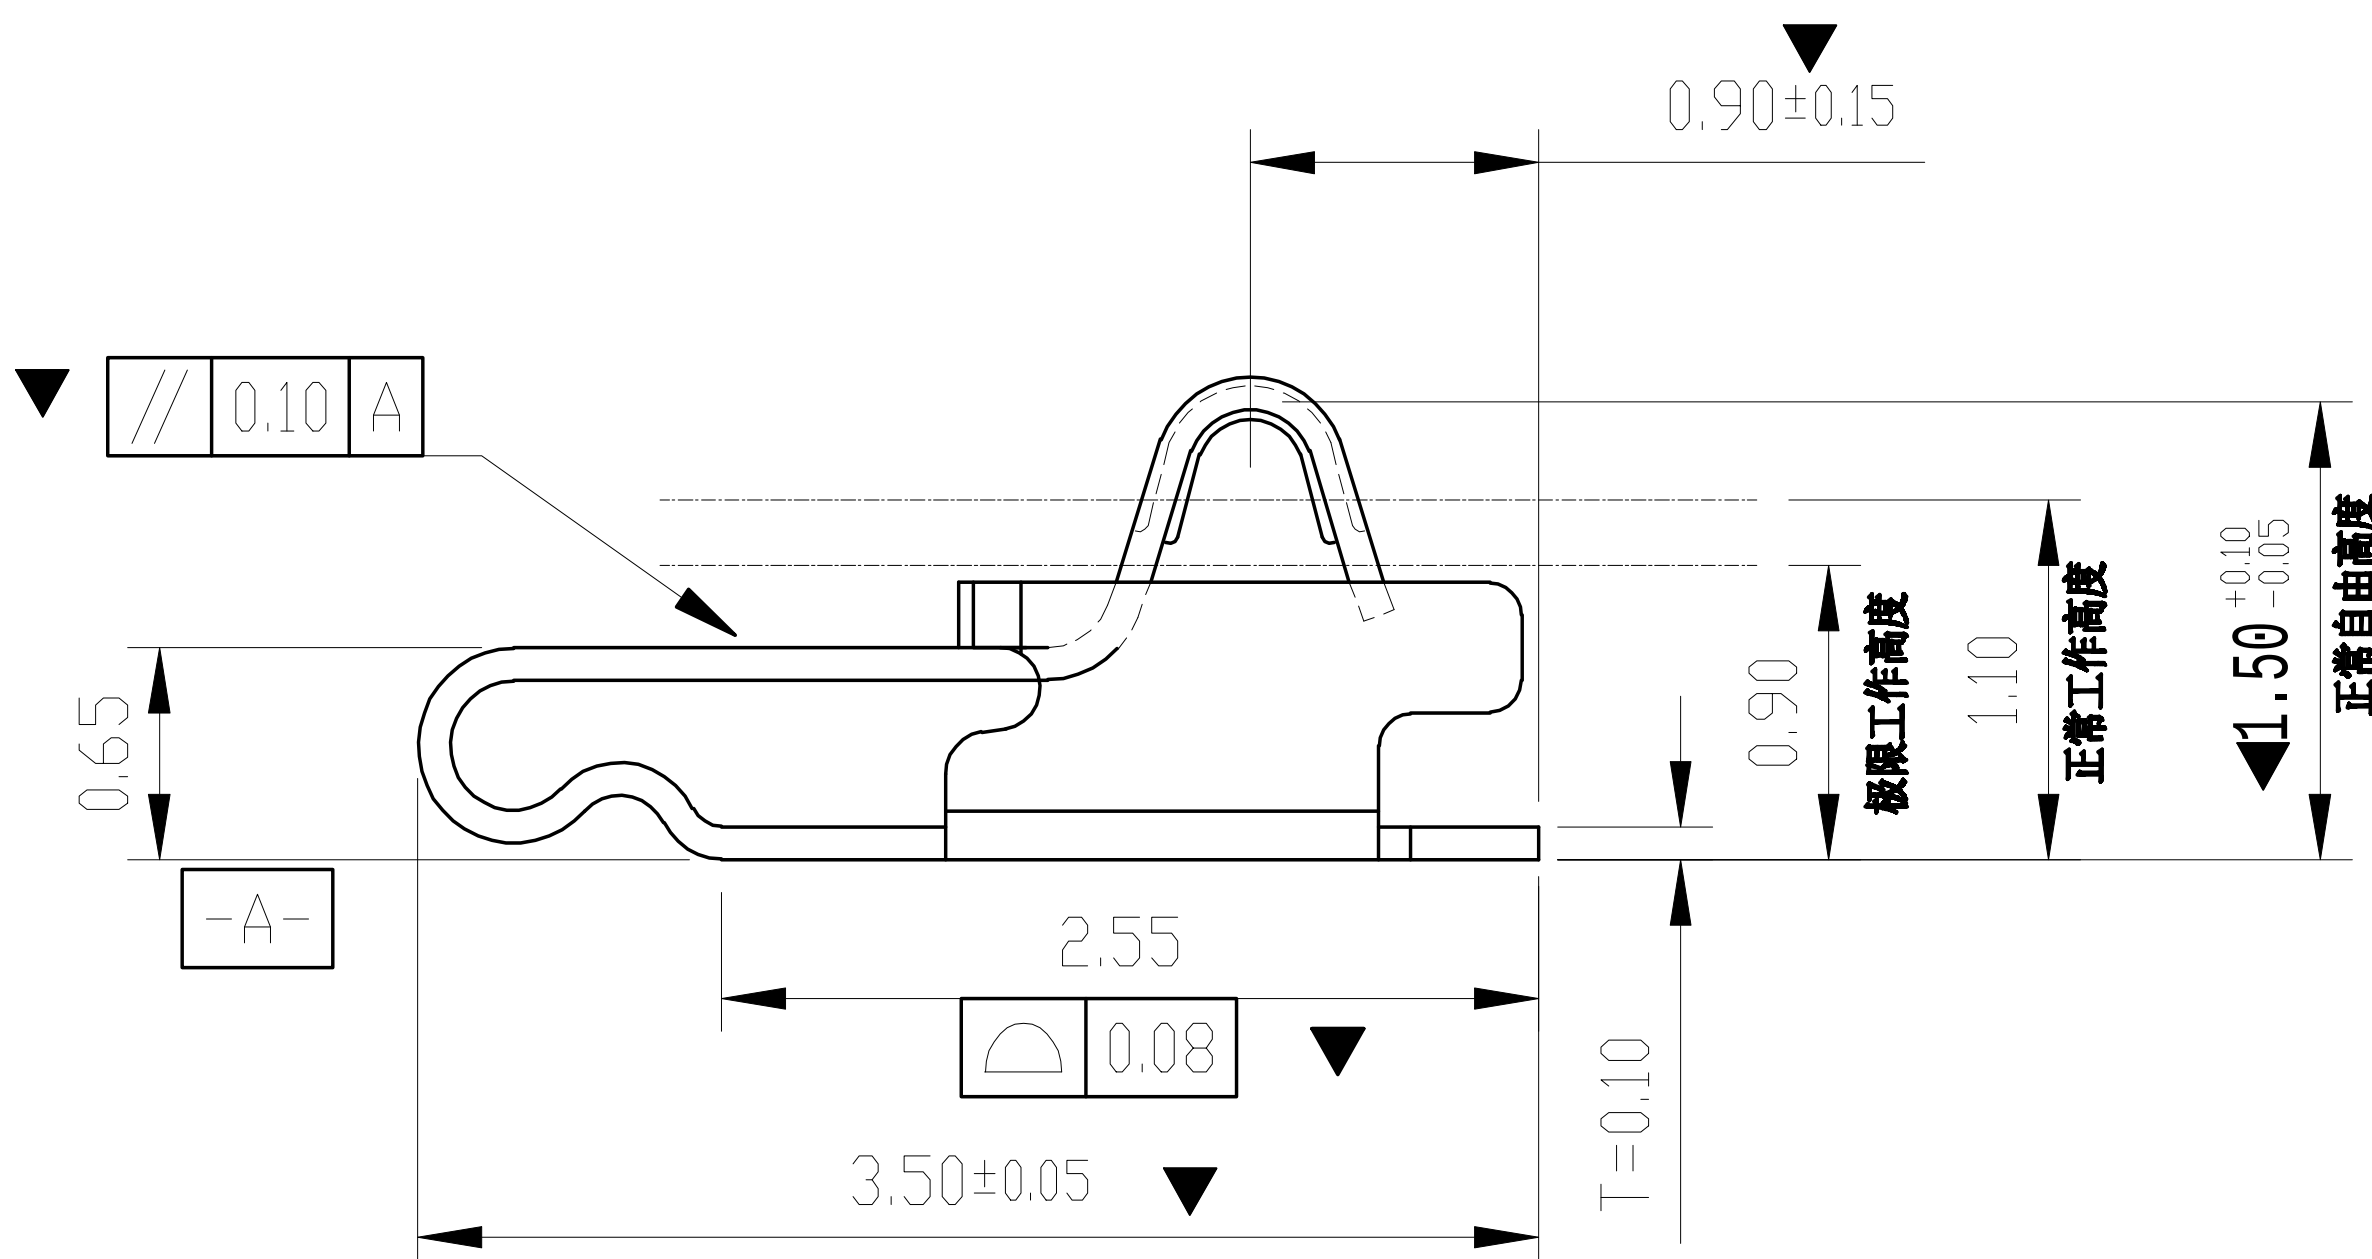
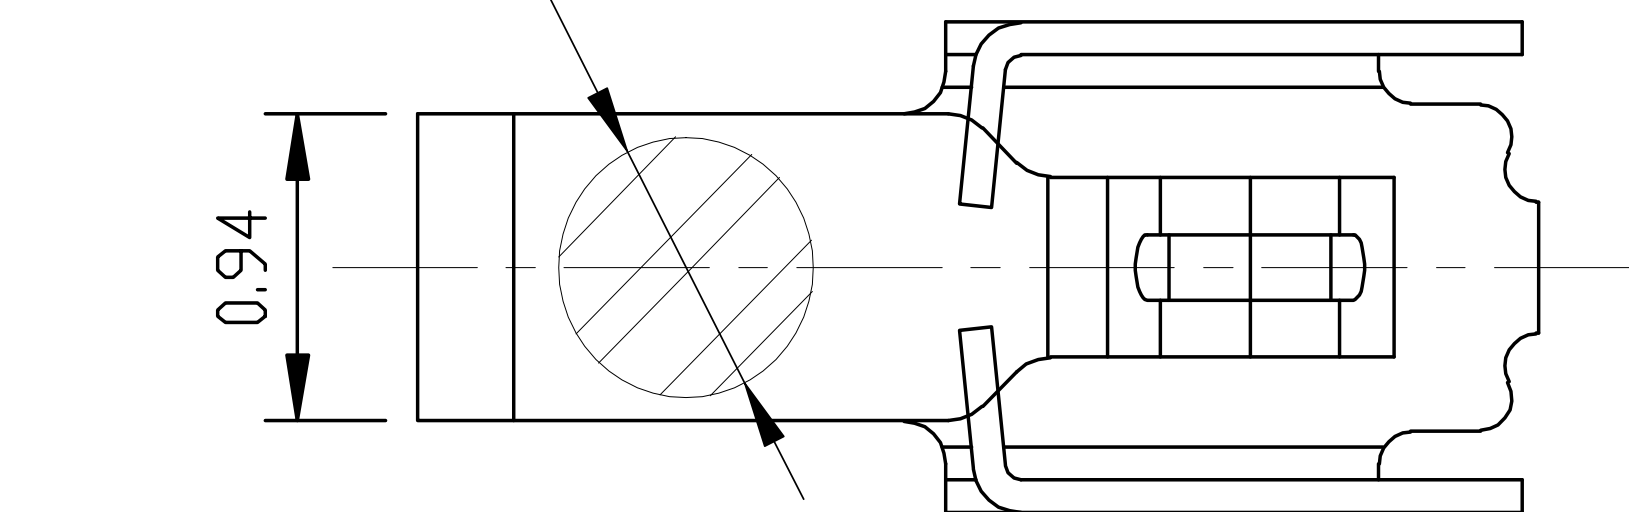


Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved

Sucker position
Ø0.80

Size of bonding pad

Dimensional Tolerance ±0.05

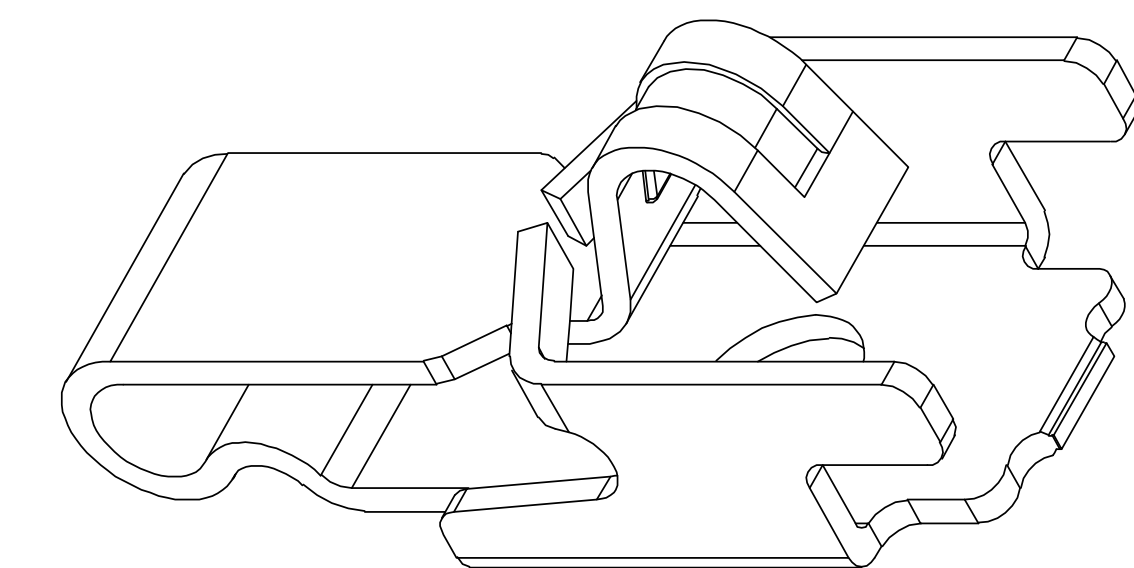

Specification

1. Material: stainless steel SUS304, $t = 0.10 \pm 0.005$;
- ▼2. The welding and contact surfaces of the Tin terminal shall be free of burrs, and the maximum size of burrs in other parts shall be 0.03mm;
3. Twisting: $45^\circ / 1000\text{mm}$, arch 5mm/1000nm;
4. Dimensions marked with "▼" shall be measured and inspected with emphasis;
5. Unmarked R Max R0.13;
6. Electroplating must be inspected by 48-hour salt spray test;
7. Life test > 20000 times The elasticity of the product shall be between 60gf and 80gf as required.
8. Ni 50~80u"min, soldering area gold-plating, contact area gold plating3U"MIN

Shenzhen Kinghelm Electronics Co., Ltd.	GENERAL TOLERANCE		SCALE: 1:1		DRAWN	DATE	DWG. NO. 681-0024A-1	Customer's drawing RF Antenna Spring, SMT, L3.5*W1.5*H1.5mm	REV. A
www.kinghelm.net	XX. ±0.50				CHECK	DATE			PARTS NO.(INTENDED USE) JXH0024A1
KH-351515-TP	X. ±0.35	X.° ±2.0°	UNIT: mm		APPROVE	DATE			
	.X ±0.25	.X° ±1.0°							
	.XX ±0.15	.XX° ±0.5°	SIZE: A4						