Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved

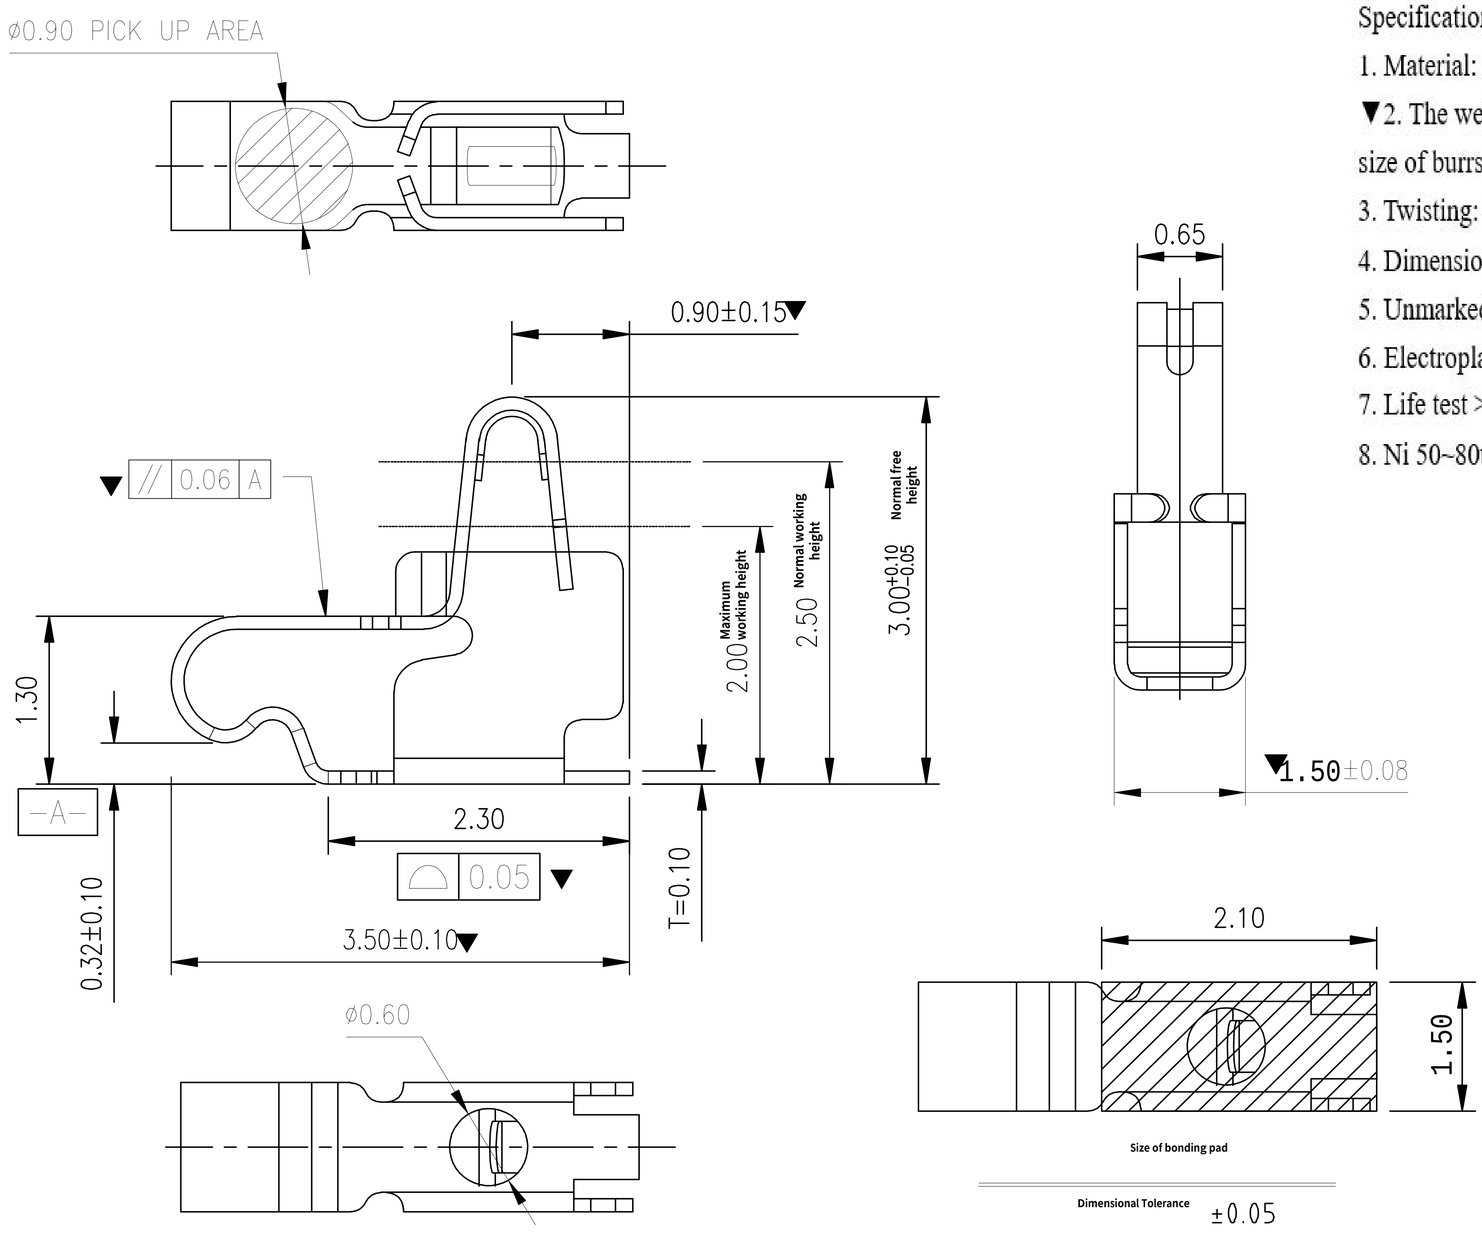

Specification

1. Material: stainless steel SUS301, T = 0.10 ± 0.005;
▼2. The welding and contact surfaces of the Tin terminal shall be free of burrs, and the maximum size of burrs in other parts shall be 0.03mm;
3. Twisting: 45 ° / 1000mm, arch 5mm/1000nim;
4. Dimensions marked with "▼" shall be measured and inspected with emphasis;
5. Unmarked R Max R0.13;
6. Electroplating must be inspected by 48-hour salt spray test;
7. Life test > 20000 times The elasticity of the product shall be between 60gf and 80gf as required.
8. Ni 50~80u"min, soldering area gold-plating, contact area gold plating3U"MIN

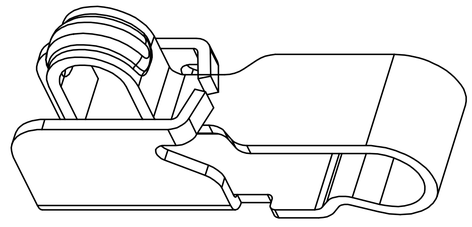

Shenzhen Kinghelm Electronics Co., Ltd. www.kinghelm.net KH-351530-TP	GENERALTOLERANCE XX. ±0.50 X. ±0.35 / X.° ±2.0° .X ±0.25 / .X° ±1.0° .XX ±0.15 / .XX° ±0.5°	SCALE: 1:1 UNIT: mm SIZE: A4	DRAWN CHECK APPROVE	DATE DATE DATE	DWG. NO. 681−0031A−2 PARTS NO.(INTENDED USE) JXH0031A2	TITLE Customer's drawing RF Antenna Spring,SMT, L3.5*W1.5*H3.0mm	REV. A SHEET 1/1