
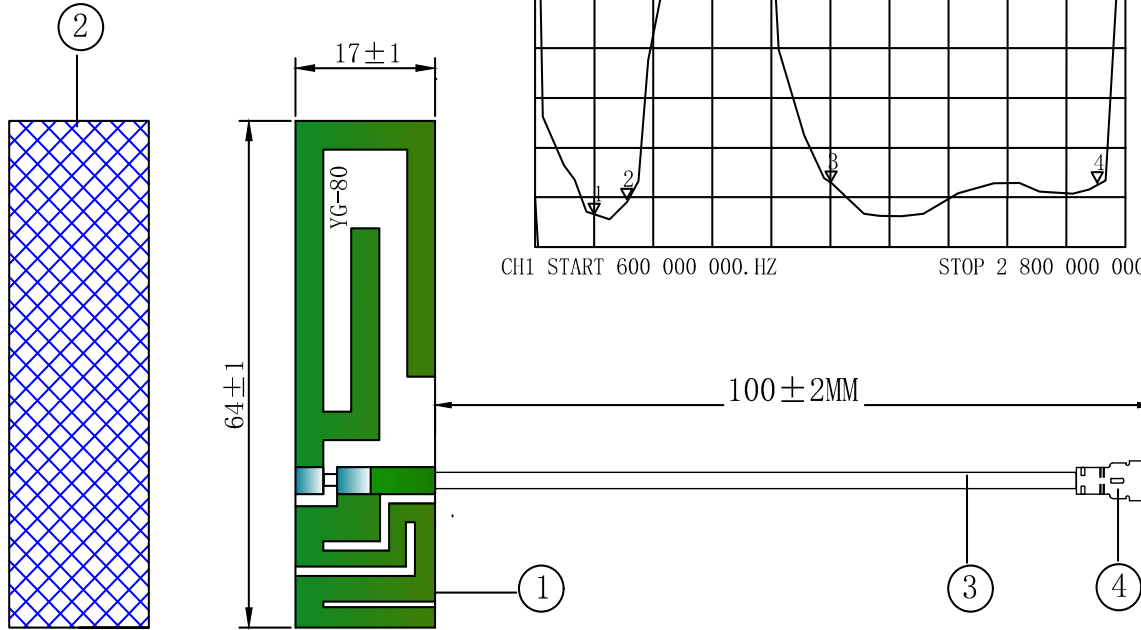


The inspection shall lay emphasis on the dimensions marked with \*

# Model: KH-FPC4G-1.13IPEX-100-6417

All graphic products comply with ROHS standards

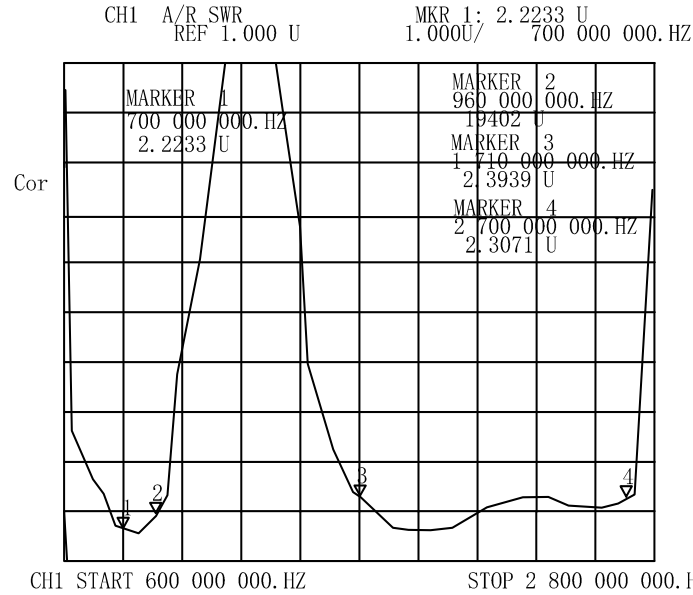

Performance parameters	
Product name	Built-in antenna
Model Type	KH-FPC4G-1.13IPEX-100-6417
Frequency Range	700-960/1710-2700 MHz
Band Width	260/990MHz
Vswr	≤2.5
Gain	2 DBi
Impedance	50 OHM
Polarization	Vertical
Radiation	OMNIDIRECTIONAL
Max power	10 W
Connector	IPEX
Cable	RF1.13-100MM
Dimensions	64 mm * 17 mm
material	PI
Temperature	-35 °-- 85°
Lighting protection	DC grounding
Weight	

## Description of Material Technics

No.	Material name	Product description	Quantity
①	Antenna element	PI	1
②	Installation method	3M 300LSE	1
③	CABLE	RFφ1.13 COAXIAL CABLE 50ohm BLACK	1
④	CONNECTOR	IPEX 一代	1

SHENZHEN KINGHELM ELECTRONIC CO., LTD.				www.BDS666.COM			
KH-FPC4G-1.13IPEX-100-6417				0755-83044319			
Tolerance	History of Changes	Date	Changed by	Part Number	No.		
.x ±0.30 x.x ±0.20 x.xx ±0.10 ANGULAR @5°~					Built-in 4G antenna		
				Model	KH-FPC4G-1.13IPEX-100-6417		
Graphic Method	scale	Paper	A4	Drawn	Date 2020.06.30		
	unit	Version	A	checked	Page 1/1		